




LOCKS FOR ALUMINIUM DOORS

Cylinder mortice locks, mid-rail type H = 82 mm	187
Cylinder mortice locks, mid-rail type H = 44-64-77 mm	189
Oval shaped cylinder mortice locks.....	193
Euro profile cylinder mortice locks	197
Cylinder mortice locks for shutters.....	199
Cylinder mortice locks with swing bolt.....	200
Cylinder multipoint mortice locks with swing bolt.....	207
Cylinder gear mortice locks.....	213
Cylinder multipoint gear mortice locks.....	215
Modular, cylinder multipoint gear mortice locks	220
Double-bit key mortice locks, mid-rail type B = 70 mm	225
Double-bit key mortice locks, mid-rail type B = 90-100 mm	227
Electric strikers for mortice locks.....	230
Kits for additional locking points.....	231
Accessories for aluminium locks.....	237
Adjustable metal striking plates	250
Nylon striking plates.....	258
Dimensional drawings.....	278





Technical features:

- Case height 82 mm
- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and bolt
- Electrical versions are interchangeable with item 44115/6 and item 44145/6

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:


- Specific striking plates

Hand:
0 = Non-handed


1 = R.H. inwards

2 = L.H. inwards

Cylinder to be ordered separately



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	 Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.



- Dead-locking latch
- 12 V ac CE


-	48	16	58	0,560	12	1	14010	60	1
-	48	16	58	0,560	12	1	14010	60	2
-	48	20	58	0,588	12	1	14011	60	1
-	48	20	58	0,565	12	1	14011	60	2

- Dead-locking latch
- Hold-open latch
- 12 V ac CE

-	48	16	58	0,556	12	1	14012	60	1
-	48	16	58	0,556	12	1	14012	60	2
-	48	20	58	0,566	12	1	14013	60	1
-	48	20	58	0,566	12	1	14013	60	2


- Dead-locking latch
- Low impact piston spring
- Hold-open latch
- 12 V ac CE

-	48	16	58	0,557	12	1	14017	60	1
-	48	16	58	0,557	12	1	14017	60	2
-	48	20	58	0,583	12	1	14018	60	1
-	48	20	58	0,583	12	1	14018	60	2







- Dead-bolt only


2	-	16	58	0,485	12	1	44110	60	0
2	-	20	58	0,485	12	1	44111	60	0



- Dead-bolt only
- Interchangeable with 14010 series

2	-	16	58	0,475	12	1	44115	60	0
2	-	20	58	0,485	12	1	44116	60	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	• Dead-bolt and non-handed latch	2	48	16	58	0,553	12	1	44120	60	0	
		2	48	20	58	0,570	12	1	44121	60	0	
	• Dead-bolt and adjustable roller	2	-	16	58	0,517	12	1	44130	60	0	
		2	-	20	58	0,530	12	1	44131	60	0	
	• Non-handed latch-bolt • Latch-bolt with incorporated dead-bolt	1	48	16	58	0,500	12	1	44140	60	0	
		1	48	20	58	0,510	12	1	44141	60	0	
	• Non-handed latch-bolt • Latch-bolt with incorporated dead-bolt • Interchangeable with series 14010	1	48	16	58	0,500	12	1	44145	60	0	
		1	48	20	58	0,515	12	1	44146	60	0	



Technical features:

- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and dead-bolt
- Latch or reversible latch/bolt (where this is provided for)
- Electrical and mechanical versions are interchangeable

Supplied as standard:


- Cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates


Hand:
0 = Non-handed




Cylinder to be ordered separately












Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	 Pieces	ITEM			
								Type	Dim.	Hand	Fin.


 <ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE 	-	67	16	70	0,560	12	1	14350	70	0			
	-	67	16	80	0,595	12	1	14350	80	0			
	-	67	16	90	0,627	12	1	14350	90	0			
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE 	-	67	20	70	0,580	12	1	14351	70	0		
		-	67	20	80	0,633	12	1	14351	80	0		
		-	67	20	90	0,643	12	1	14351	90	0		
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE • 4.5 mm. extra protruding latch and pin 	-	67	14,7	70	0,576	12	1	14352	70	0		
		-	67	14,7	80	0,608	12	1	14352	80	0		

 <ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE 	-	67	16	70	0,562	12	1	14450	70	0			
	-	67	16	80	0,594	12	1	14450	80	0			
	-	67	16	90	0,629	12	1	14450	90	0			
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE 	-	67	20	70	0,580	12	1	14451	70	0		
		-	67	20	80	0,608	12	1	14451	80	0		
		-	67	20	90	0,645	12	1	14451	90	0		
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE • 4.5 mm. extra protruding latch and pin 	-	67	14,7	70	0,577	12	1	14452	70	0		
		-	67	14,7	80	0,609	12	1	14452	80	0		
		-	67	14,7	90	0,642	12	1	14452	90	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
 <ul style="list-style-type: none"> • Case height 77 mm. • Dead-locking latch and dead-bolt • 12 V ac CE 		2	67	16	70	0,612	12	1	14460	70	0	
		2	67	16	80	0,656	12	1	14460	80	0	
		2	67	16	90	0,709	12	1	14460	90	0	
		2	67	20	70	0,627	12	1	14461	70	0	
		2	67	20	80	0,665	12	1	14461	80	0	
		2	67	20	90	0,722	12	1	14461	90	0	
		2	67	14,7	70	0,624	12	1	14462	70	0	
		2	67	14,7	80	0,670	12	1	14462	80	0	
		2	67	14,7	90	0,721	12	1	14462	90	0	
		• Case height 77 mm.										
		• Dead-locking latch and dead-bolt										
		• 12 V ac CE										
	• Case height 64 mm.											
	• Dead-locking latch only											
	• Hold-open latch											
	• 12 V ac CE											
	• Case height 64 mm.											
	• Dead-locking latch only											
	• Hold-open latch											
	• 12 V ac CE											
	• Case height 64 mm.											
	• Dead-locking latch only											
	• Hold-open latch											
	• 12 V ac CE											
	• 4.5 mm. extra protruding latch, pin and dead-bolt											
 <ul style="list-style-type: none"> • Case height 64 mm. • Dead-locking latch only • Hold-open latch • 12 V ac CE 		-	67	16	70	0,547	12	1	14510	70	0	
		-	67	16	80	0,580	12	1	14510	80	0	
		-	67	16	90	0,600	12	1	14510	90	0	
		-	67	20	70	0,564	12	1	14511	70	0	
		-	67	20	80	0,580	12	1	14511	80	0	
		-	67	20	90	0,600	12	1	14511	90	0	
		-	67	14,7	70	0,554	12	1	14512	70	0	
		-	67	14,7	80	0,580	12	1	14512	80	0	
		-	67	14,7	90	0,600	12	1	14512	90	0	
		• Case height 64 mm.										
		• Dead-locking latch only										
		• Hold-open latch										
	• 12 V ac CE											
	• Case height 64 mm.											
	• Dead-locking latch only											
	• Hold-open latch											
	• 12 V ac CE											
	• 4.5 mm. extra protruding latch and pin											
 <ul style="list-style-type: none"> • Case height 44 mm. • Latch with incorporated dead-bolt 		1	67	16	60	0,400	12	1	44150	60	0	
		2	67	16	70	0,415	12	1	44150	70	0	
		2	67	16	80	0,445	12	1	44150	80	0	
		2	67	16	90	0,470	12	1	44150	90	0	
		1	67	20	60	0,423	12	1	44151	60	0	
		2	67	20	70	0,445	12	1	44151	70	0	
		2	67	20	80	0,460	12	1	44151	80	0	
		2	67	20	90	0,490	12	1	44151	90	0	
		2	67	14,7	70	0,438	12	1	44152	70	0	
		2	67	14,7	80	0,455	12	1	44152	80	0	
		2	67	14,7	90	0,475	12	1	44152	90	0	
		• Case height 44 mm.										
	• Latch with incorporated dead-bolt											
	• Case height 44 mm.											
	• Latch with incorporated dead-bolt											
	• Case height 44 mm.											
	• 4.5 mm. extra protruding latch with incorporated dead-bolt											

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM						
								Type	Dim.	Hand	Fin.	Pers. Spec.		
	<ul style="list-style-type: none"> • Case height 64 mm. • Latch with incorporated dead-bolt 	1	67	16	60	0,521	12	1	44155	60	0			
		2	67	16	70	0,550	12	1	44155	70	0			
		2	67	16	80	0,570	12	1	44155	80	0			
		2	67	16	90	0,590	12	1	44155	90	0			
	<ul style="list-style-type: none"> • Case height 64 mm. • Latch with incorporated dead-bolt 	1	67	20	60	0,531	12	1	44156	60	0			
		2	67	20	70	0,576	12	1	44156	70	0			
		2	67	20	80	0,590	12	1	44156	80	0			
		2	67	20	90	0,610	12	1	44156	90	0			
	<ul style="list-style-type: none"> • Case height 64 mm. • 4.5 mm. extra protruding latch with incorporated dead-bolt 	2	67	14	70	0,576	12	1	44157	70	0			
		2	67	14	80	0,595	12	1	44157	80	0			
		<ul style="list-style-type: none"> • Case height 44 mm. • Adjustable roller with incorporated dead-bolt 	1	-	16	60	0,384	12	1	44160	60	0		
			2	-	16	70	0,413	12	1	44160	70	0		
2			-	16	80	0,450	12	1	44160	80	0			
2			-	16	90	0,470	12	1	44160	90	0			
<ul style="list-style-type: none"> • Case height 44 mm. • Adjustable roller with incorporated dead-bolt 		1	-	20	60	0,404	12	1	44161	60	0			
		2	-	20	70	0,420	12	1	44161	70	0			
		2	-	20	80	0,450	12	1	44161	80	0			
		2	-	20	90	0,470	12	1	44161	90	0			
		<ul style="list-style-type: none"> • Case height 64 mm. • Adjustable roller with incorporated dead-bolt 	2	-	16	70	0,545	12	1	44165	70	0		
			2	-	16	80	0,570	12	1	44165	80	0		
		<ul style="list-style-type: none"> • Case height 64 mm. • Adjustable roller with incorporated dead-bolt 	2	-	20	70	0,569	12	1	44166	70	0		
			2	-	20	80	0,580	12	1	44166	80	0		
			<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 	2	-	16	70	0,521	12	1	44350	70	0	
				2	-	16	80	0,544	12	1	44350	80	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 		2	-	20	70	0,529	12	1	44351	70	0			
		2	-	20	80	0,557	12	1	44351	80	0			
			<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 	2	-	16	70	0,516	12	1	44450	70	0	
				2	-	16	80	0,544	12	1	44450	80	0	
<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt only 	2		-	20	70	0,533	12	1	44451	70	0			
	2		-	20	80	0,560	12	1	44451	80	0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	16	70	0,560	12	1	44360	70	0	
		2	67	16	80	0,598	12	1	44360	80	0	
		2	67	16	90	0,621	12	1	44360	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	20	70	0,585	12	1	44361	70	0	
		2	67	20	80	0,609	12	1	44361	80	0	
		2	67	20	90	0,641	12	1	44361	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • 4.5 mm. extra protruding dead-bolt and latch 	2	67	14,7	70	0,582	12	1	44362	70	0	
		2	67	14,7	80	0,613	12	1	44362	80	0	
		2	67	14,7	90	0,642	12	1	44362	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	16	70	0,568	12	1	44460	70	0	
		2	67	16	80	0,590	12	1	44460	80	0	
		2	67	16	90	0,628	12	1	44460	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Dead-bolt and latch 	2	67	20	70	0,583	12	1	44461	70	0	
		2	67	20	80	0,611	12	1	44461	80	0	
		2	67	20	90	0,630	12	1	44461	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • 4.5 mm. extra protruding dead-bolt and latch 	2	67	14,7	70	0,587	12	1	44462	70	0	
		2	67	14,7	80	0,605	12	1	44462	80	0	
		2	67	14,7	90	0,639	12	1	44462	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	-	16	70	0,576	12	1	44370	70	0	
		2	-	16	80	0,579	12	1	44370	80	0	
		2	-	16	90	0,610	12	1	44370	90	0	
	<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	-	20	70	0,568	12	1	44371	70	0	
		2	-	20	80	0,590	12	1	44371	80	0	
		2	-	20	90	0,624	12	1	44371	90	0	
		<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 	2	-	16	70	0,542	12	1	44470	70	0
			2	-	16	80	0,583	12	1	44470	80	0
			2	-	16	90	0,607	12	1	44470	90	0
<ul style="list-style-type: none"> • Case height 77 mm. • Adjustable dead-bolt and roller 		2	-	20	70	0,559	12	1	44471	70	0	
		2	-	20	80	0,601	12	1	44471	80	0	
		2	-	20	90	0,620	12	1	44471	90	0	



Technical features:

- Zinc plated case
- Zinc plated faceplate
- Brass latch, roller and bolt

Supplied as standard:

- Cylinder fixing screws
- Instruction sheet (if this is provided for)

On request:

- Specific striking plates


Hand:






0 = Non-handed





1 = R.H. inwards







2 = L.H. inwards







Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	 Pieces	ITEM				
								Type	Dim.	Hand	Fin. Pers. Spec.	
	<ul style="list-style-type: none"> • Dead-locking latch • 12 V ac CE 	-	-	16	15	0,360	1	1	14020	15	1	
		-	-	16	15	0,355	1	1	14020	15	2	
		-	-	16	18	0,371	1	1	14020	18	1	
		-	-	16	18	0,365	1	1	14020	18	2	
	<ul style="list-style-type: none"> • Dead-locking latch • 12 V ac CE 	-	-	20	15	0,381	1	1	14021	15	1	
		-	-	20	15	0,381	1	1	14021	15	2	
		-	-	20	18	0,394	1	1	14021	18	1	
		-	-	20	18	0,394	1	1	14021	18	2	
	<ul style="list-style-type: none"> • Nickel-plated dead-bolt only • Zinc plated steel flat striker item 1.07027.00.0 	1	-	20	16	0,265	12	1	44210	16	0	
	<ul style="list-style-type: none"> • Case height 85 mm. • Cylinder activated non-handed latch 	-	-	16	15	0,135	12	1	44217	15	0	
	<ul style="list-style-type: none"> • Case height 85 mm. • Cylinder activated non-handed latch 	-	-	20	15	0,230	12	1	44218	15	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM							
								Type	Dim.	Hand	Fin.	Pers. Spec.			
	<ul style="list-style-type: none"> • 4.5 mm. extra protruding dead-bolt and non-handed latch • Latch can be activated by key 	1	69	14,7	25	0,365	12	1	44219	25	0				
		1	69	14,7	30	0,410	12	1	44219	30	0				
	<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18 	1	69	16	15	0,290	12	1	44220	15	0				
		1	69	16	18	0,310	12	1	44220	18	0				
		1	69	16	25	0,350	12	1	44220	25	0				
		1	69	16	30	0,390	12	1	44220	30	0				
		1	69	16	35	0,425	12	1	44220	35	0				
	<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15 and 18 	1	69	20	15	0,305	12	1	44221	15	0				
		1	69	20	18	0,328	12	1	44221	18	0				
		1	69	20	25	0,360	12	1	44221	25	0				
		1	69	20	30	0,405	12	1	44221	30	0				
		1	69	20	35	0,430	12	1	44221	35	0				
		<ul style="list-style-type: none"> • 4.5 mm. extra protruding dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=25 	2	69	14,7	25	0,390	12	1	44224	25	0			
			2	69	14,7	30	0,434	12	1	44224	30	0			
		<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 	2	69	16	15	0,318	12	1	44225	15	0			
2			69	16	18	0,335	12	1	44225	18	0				
2			69	16	25	0,374	12	1	44225	25	0				
2			69	16	30	0,416	12	1	44225	30	0				
2			69	16	35	0,454	12	1	44225	35	0				
<ul style="list-style-type: none"> • Dead-bolt and non-handed latch • Latch can be activated by key except for locks with E=15-18-25 		2	69	20	15	0,336	12	1	44226	15	0				
		2	69	20	18	0,355	12	1	44226	18	0				
		2	69	20	25	0,385	12	1	44226	25	0				
		2	69	20	30	0,433	12	1	44226	30	0				
		2	69	20	35	0,465	12	1	44226	35	0				
		<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 	-	-	16	15	0,235	12	1	44227	15	0			
		<ul style="list-style-type: none"> • Case height 85 mm. • Handle activated non-handed latch 	-	-	20	15	0,180	12	1	44228	15	0			
		<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 	1	-	16	15	0,265	12	1	44230	15	0			
	1		-	16	18	0,292	12	1	44230	18	0				
	1		-	16	25	0,340	12	1	44230	25	0				
	1		-	16	30	0,375	12	1	44230	30	0				
	1		-	16	35	0,408	12	1	44230	35	0				
	<ul style="list-style-type: none"> • Adjustable dead-bolt and roller 	1	-	20	15	0,293	12	1	44231	15	0				
		1	-	20	18	0,313	12	1	44231	18	0				
		1	-	20	25	0,359	12	1	44231	25	0				
		1	-	20	30	0,391	12	1	44231	30	0				
		1	-	20	35	0,426	12	1	44231	35	0				

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM					
								Type	Dim.	Hand	Fin.	Pers. Spec.	
	• Adjustable dead-bolt and roller	2	-	16	15	0,300	12	1	44235	15	0		
		2	-	16	18	0,320	12	1	44235	18	0		
		2	-	16	25	0,366	12	1	44235	25	0		
		2	-	16	30	0,398	12	1	44235	30	0		
		2	-	16	35	0,434	12	1	44235	35	0		
	• Adjustable dead-bolt and roller	2	-	20	15	0,320	12	1	44236	15	0		
		2	-	20	18	0,340	12	1	44236	18	0		
		2	-	20	25	0,415	12	1	44236	25	0		
		2	-	20	30	0,419	12	1	44236	30	0		
		2	-	20	35	0,454	12	1	44236	35	0		
	• Case height 70 mm. • Adjustable roller	-	-	16	15	0,135	12	1	44237	15	0		
	• Case height 70 mm. • Adjustable roller	-	-	20	15	0,145	12	1	44238	15	0		
	• Dead-bolt only	1	-	16	15	0,180	12	1	44240	15	0		
		1	-	16	18	0,199	12	1	44240	18	0		
		1	-	16	25	0,234	12	1	44240	25	0		
		1	-	16	30	0,261	12	1	44240	30	0		
		1	-	16	35	0,290	12	1	44240	35	0		
	• Dead-bolt only	1	-	20	15	0,195	12	1	44241	15	0		
		1	-	20	18	0,211	12	1	44241	18	0		
		1	-	20	25	0,246	12	1	44241	25	0		
		1	-	20	30	0,273	12	1	44241	30	0		
		1	-	20	35	0,300	12	1	44241	35	0		
	• Dead bolt only (without protrusion)	2	69	20	15	0,175	12	1	44242	15	0		
		• Dead-bolt only	2	-	16	15	0,210	12	1	44245	15	0	
			2	-	16	18	0,225	12	1	44245	18	0	
2			-	16	25	0,256	12	1	44245	25	0		
2			-	16	30	0,286	12	1	44245	30	0		
2			-	16	35	0,315	12	1	44245	35	0		
• Dead-bolt only		2	-	20	15	0,220	12	1	44246	15	0		
		2	-	20	18	0,239	12	1	44246	18	0		
		2	-	20	25	0,274	12	1	44246	25	0		
		2	-	20	30	0,300	12	1	44246	30	0		
		2	-	20	35	0,329	12	1	44246	35	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Nickle-plated laminar steel Zinc plated steel flat striker item 1.07028.00.0 	1	-	20	16	0,255	12	1	45010	16	0
	<ul style="list-style-type: none"> Nickel-plated laminated steel hook with throw Nickel-plated steel guide pin Zinc plated steel flat striker item 1.07028.05.0 	1	-	20	16	0,260	12	1	45012	16	0
	<ul style="list-style-type: none"> Nickel-plated laminated steel dead locking hookbolt Zinc plated steel flat striker item 1.07028.00.0 	1	-	20	16	0,255	12	1	45015	16	0
	<ul style="list-style-type: none"> Nickel-plated laminated steel dead locking hookbolt Nickel-plated steel guide pin Zinc plated steel flat striker item 1.07028.05.0 	1	-	20	16	0,260	12	1	45017	16	0
	<ul style="list-style-type: none"> Nickel-plated laminated steel hook with latch bolt Dead locking latch Zinc plated steel flat striker item 1.07028.00.0 	1	-	20	16	0,255	12	1	45025	16	0
	<ul style="list-style-type: none"> Nickel-plated laminated steel hook with latch bolt Dead locking latch Nickel-plated steel guide pin Zinc plated steel flat striker item 1.07028.05.0 	1	-	20	16	0,260	12	1	45027	16	0



Technical features:

- Zinc plated case
- Zinc plated faceplate
- Nickel-plated roller, bolt and hook bolt
- Nickel-plated, reversible latch

Supplied as standard:


- Cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates

Hand:
0 = Non-handed

Cylinder to be ordered separately




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 		ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.




- Dead-bolt and latch
- Dead-bolt and 5 mm. extra protruding latch

1	85	22	21	0,407	1	1 44620 20 0
1	85	22	25	0,431	1	1 44620 25 0
1	85	22	30	0,470	1	1 44620 30 0
1	85	22	35	0,505	1	1 44620 35 0
1	85	22	21	0,431	1	1 44621 20 0
1	85	22	25	0,453	1	1 44621 25 0
1	85	22	30	0,501	1	1 44621 30 0
1	85	22	35	0,530	1	1 44621 35 0



- Dead-bolt and latch
- Dead-bolt and 5 mm. extra protruding latch

2	85	22	21	0,420	1	1 44625 20 0
2	85	22	25	0,446	1	1 44625 25 0
2	85	22	30	0,486	1	1 44625 30 0
2	85	22	35	0,518	1	1 44625 35 0
2	85	22	21	0,430	1	1 44626 20 0
2	85	22	25	0,479	1	1 44626 25 0
2	85	22	30	0,509	1	1 44626 30 0
2	85	22	35	0,538	1	1 44626 35 0



- Dead-bolt and adjustable roller

1	-	22	21	0,368	1	1 44630 20 0
1	-	22	25	0,394	1	1 44630 25 0
1	-	22	30	0,470	1	1 44630 30 0
1	-	22	35	0,463	1	1 44630 35 0



- Dead-bolt and adjustable roller

2	-	22	21	0,375	1	1 44635 20 0
2	-	22	25	0,410	1	1 44635 25 0
2	-	22	30	0,450	1	1 44635 30 0
2	-	22	35	0,479	1	1 44635 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt only

1	-	22	21	0,334	1	1	44640	20	0
1	-	22	25	0,357	1	1	44640	25	0
1	-	22	30	0,396	1	1	44640	30	0
1	-	22	35	0,435	1	1	44640	35	0



- Dead-bolt only

2	-	22	21	0,347	1	1	44645	20	0
2	-	22	25	0,371	1	1	44645	25	0
2	-	22	30	0,405	1	1	44645	30	0
2	-	22	35	0,443	1	1	44645	35	0




- Brass faceplate
- Laminar steel hook
- Brass striker item 1.07028.10.0

1	-	20	30	0,315	1	1	45100	30	0
1	-	20	35	0,330	1	1	45100	35	0
1	-	20	40	0,345	1	1	45100	40	0
1	-	20	45	0,368	1	1	45100	45	0
1	-	20	50	0,385	1	1	45100	50	0
1	-	20	60	0,400	1	1	45100	60	0

- Laminar steel hook
- Zinc plated steel flat striker item 1.07028.00.0

1	-	20	30	0,315	1	1	45110	30	0
1	-	20	35	0,325	1	1	45110	35	0
1	-	20	40	0,330	1	1	45110	40	0
1	-	20	45	0,365	1	1	45110	45	0
1	-	20	50	0,370	1	1	45110	50	0
1	-	20	60	0,405	1	1	45110	60	0



Technical features:

- Zinc plated steel case.
- Stainless steel faceplate
- Can be fitted with additional locking points
- Spindle for operating the dead-bolt and reloading pins, which can be locked by key

Supplied as standard:


- Set of nylon roses item 1.06012.01.0
- Set of faceplate spacers item 1.06141.65.0
- Threaded pins for fixing the extended bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates
- Cylinder protective rose item 1.06460.00.0

Hand:
0 = Non-handed

Cylinder to be ordered separately
series 08710 or 0E300 (ASIX)




Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	 Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.




- Nickel-plated dead-bolt
- ON REQUEST:
 - Cross-key cylinder item 1.02400.10.0
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,620	12	1 46200 25 0
1	85	22	30	0,640	12	1 46200 30 0
1	85	22	35	0,610	12	1 46200 35 0

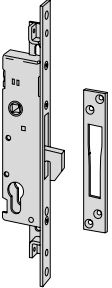

- Nickel-plated hook
- Stainless steel striking plate item 1.06459.01.0
- ON REQUEST:
 - Cross-key cylinder item 1.02400.10.0
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,650	12	1 46265 25 0
1	85	22	30	0,670	12	1 46265 30 0
1	85	22	35	0,693	12	1 46265 35 0



- No frontal closure
- ON REQUEST:
 - Cross-key cylinder item 1.02400.10.0
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

-	85	22	25	0,570	12	1 46275 25 0
-	85	22	30	0,540	12	1 46275 30 0
-	85	22	35	0,560	12	1 46275 35 0



Technical features:

- Zinc plated steel case
- Stainless steel faceplate
- Nickel-plated latch, roller, bolt and hook bolt
- Latch or reversible latch/bolt (if this is provided for)

Hand:

0 = Non-handed

Supplied as standard:

- Set of faceplate spacers item 1.06141.65.0
- Lock and cylinder fixing screws
- Instruction sheet


Cylinder to be ordered separately
series 08710 or 0E300 (ASIX)

On request:

- Specific striking plates
- Cylinder protective rose item 1.06460.00.0




Type	Description	Throws	Centre Distance	Faceplate Backset	Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers.




- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- 12 V ac CE

-	85	22	25	0,740	1	1	16205	25	0		
-	85	22	30	0,770	1	1	16205	30	0		
-	85	22	35	0,815	1	1	16205	35	0		



- Cross-key cylinder with 3 keys
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- 12 V ac CE


-	85	22	25	0,841	1	1	16207	25	0		
-	85	22	30	0,886	1	1	16207	30	0		
-	85	22	35	0,921	1	1	16207	35	0		



- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- 12 V ac CE


1	85	22	25	0,780	1	1	16215	25	0		
1	85	22	30	0,825	1	1	16215	30	0		
1	85	22	35	0,865	1	1	16215	35	0		

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.




- Dead-bolt and latch
- Dead-bolt sides strengthened by hardened steel plates
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- Stainless steel striker item 1.06462.01.0
- 12 V ac CE

1	85	22	25	0,850	1	1	16216 25 0
1	85	22	30	0,895	1	1	16216 30 0
1	85	22	35	0,935	1	1	16216 35 0




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- 12 V ac CE

1	85	22	25	0,889	1	1	16217 25 0
1	85	22	30	0,935	1	1	16217 30 0
1	85	22	35	0,970	1	1	16217 35 0








- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- Pre-arranged for additional locking points
- Threaded pivots for fixing extended bolts
- 12 V ac CE
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,845	1	1	16225 25 0
1	85	22	30	0,890	1	1	16225 30 0
1	85	22	35	0,935	1	1	16225 35 0




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- 12 V ac CE
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

1	85	22	25	0,935	1	1	16227 25 0
1	85	22	30	0,996	1	1	16227 30 0
1	85	22	35	1,041	1	1	16227 35 0

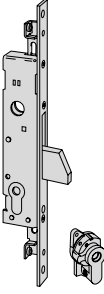
Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM						
								Type	Dim.	Hand	Fin.	Pers.	Spec.	
	• Dead-bolt only	1	-	22	25	0,545	12	1	46210	25	0			
	• Set of nylon roses item 1.06012.01.0	1	-	22	30	0,575	12	1	46210	30	0			
		1	-	22	35	0,560	12	1	46210	35	0			
	• Cross-key cylinder with 3 keys	1	-	22	25	0,650	12	1	46212	25	0			
	• Dead-bolt only	1	-	22	30	0,670	12	1	46212	30	0			
	• Set of nylon roses item 1.06002.00.0	1	-	22	35	0,690	12	1	46212	35	0			
	• Dead-bolt only	1	-	22	25	0,600	12	1	46220	25	0			
	• Pre-arranged for additional locking points	1	-	22	30	0,620	12	1	46220	30	0			
	• Set of nylon roses item 1.06012.01.0	1	-	22	35	0,650	12	1	46220	35	0			
	• Threaded pivots for fixing extended bolts													
	• ON REQUEST:													
	- Internal ragged extended bolts item 1.06441.00.0													
	- Internal straight extended bolts item 1.06441.10.0													
	- External bolt connectors item 1.06442.00.0													
	- Extended bolts operated by internal rods item 1.06443.00.0													
	- Extended bolts operated by external rods item 1.06443.05.0													
	• Cross-key cylinder with 3 keys	1	-	22	25	0,695	12	1	46222	25	0			
	• Dead-bolt only	1	-	22	30	0,690	12	1	46222	30	0			
	• Pre-arranged for additional locking points	1	-	22	35	0,710	12	1	46222	35	0			
	• Set of nylon roses item 1.06012.01.0													
	• Threaded pivots for fixing extended bolts													
	• ON REQUEST:													
	- Internal ragged extended bolts item 1.06441.00.0													
	- Internal straight extended bolts item 1.06441.10.0													
	- External bolt connectors item 1.06442.00.0													
	- Extended bolts operated by internal rods item 1.06443.00.0													
	- Extended bolts operated by external rods item 1.06443.05.0													
	• Dead-bolt and latch	1	85	22	25	0,610	12	1	46215	25	0			
	• 11 to 17 mm. adjustable latch	1	85	22	30	0,630	12	1	46215	30	0			
	• Set of nylon roses item 1.06012.01.0	1	85	22	35	0,660	12	1	46215	35	0			
	• Dead-bolt and latch	1	92	22	25	0,610	12	1	46219	25	0			
	• 11 to 17 mm. adjustable latch	1	92	22	30	0,650	12	1	46219	30	0			
	• Set of nylon roses item 1.06012.01.0	1	92	22	35	0,670	12	1	46219	35	0			
	• Trough-hole for fixing the handle rose													

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- Dead-bolt sides strengthened by hardened steel plates
- 11 to 17 mm. adjustable latch and piston
- Set of nylon roses item 1.06012.01.0
- Stainless steel striker item 1.06461.01.0

1	85	20	25	0,690	12	1 46216 25 0
1	85	20	30	0,720	12	1 46216 30 0
1	85	20	35	0,750	12	1 46216 35 0




- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Set of nylon roses item 1.06012.01.0

1	85	22	25	0,730	12	1 46217 25 0
1	85	22	30	0,740	12	1 46217 30 0
1	85	22	35	0,770	12	1 46217 35 0



- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0


1	85	22	25	0,650	12	1 46225 25 0
1	85	22	30	0,695	12	1 46225 30 0
1	85	22	35	0,700	12	1 46225 35 0



- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0


1	85	22	25	0,750	12	1 46227 25 0
1	85	22	30	0,790	12	1 46227 30 0
1	85	22	35	0,790	12	1 46227 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers.




- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Set of nylon roses item 1.06012.01.0

1	-	22	25	0,600	12	1	46230	25	0			
1	-	22	30	0,610	12	1	46230	30	0			
1	-	22	35	0,635	12	1	46230	35	0			




- Cross-key cylinder with 3 keys
- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Set of nylon roses item 1.06002.00.0

1	-	22	25	0,680	12	1	46232	25	0			
1	-	22	30	0,700	12	1	46232	30	0			
1	-	22	35	0,720	12	1	46232	35	0			



- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0


1	-	22	25	0,630	12	1	46250	25	0			
1	-	22	30	0,660	12	1	46250	30	0			
1	-	22	35	0,685	12	1	46250	35	0			



- Cross-key cylinder with 3 keys
- Dead-bolt and latch
- 2.5 to 16.5 mm. adjustable roller
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0


1	-	22	25	0,730	12	1	46252	25	0			
1	-	22	30	0,760	12	1	46252	30	0			
1	-	22	35	0,790	12	1	46252	35	0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.




- Laminar steel hook
- Set of nylon roses item 1.06012.01.0
- Zinc plated steel striking plate item 1.06459.01.0

1	-	22	25	0,580	12	1 46240 25 0
1	-	22	30	0,610	12	1 46240 30 0
1	-	22	35	0,630	12	1 46240 35 0




- Cross-key cylinder with 3 keys
- Laminar steel hook
- Set of nylon roses item 1.06002.01.0
- Zinc plated steel striker item 1.06459.01.0

1	-	22	25	0,650	12	1 46242 25 0
1	-	22	30	0,670	12	1 46242 30 0
1	-	22	35	0,690	12	1 46242 35 0



- Laminar steel hook
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- Zinc plated steel striker item 1.06459.01.0
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

1	-	22	25	0,625	12	1 46260 25 0
1	-	22	30	0,650	12	1 46260 30 0
1	-	22	35	0,710	12	1 46260 35 0



- Cross-key cylinder with 3 keys
- Laminar steel hook
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- Zinc plated steel striker item 1.06459.01.0
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0


1	-	22	25	0,670	12	1 46262 25 0
1	-	22	30	0,690	12	1 46262 30 0
1	-	22	35	0,710	12	1 46262 35 0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.




- No frontal closure
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06012.01.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

-	-	22	25	0,550	12	1	46270	25	0
-	-	22	30	0,580	12	1	46270	30	0
-	-	22	35	0,605	12	1	46270	35	0



- Cross-key cylinder with 3 keys
- No frontal closure
- Pre-arranged for additional locking points
- Set of nylon roses item 1.06002.00.0
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

-	-	22	25	0,640	12	1	46272	25	0
-	-	22	30	0,676	12	1	46272	30	0
-	-	22	35	0,680	12	1	46272	35	0



Technical features:

- Zinc plated steel case
- Nickel-plated latch, roller and dead-bolt
- Latch or reversible latch/bolt (where this is provided for)

Supplied as standard:


- Set of nylon roses item 1.06012.01.0
- Lock and cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates
- Needle key cylinder, series 02400
- Cylinder protective rose item 1.06460.00.0

Hand:
0 = Non-handed

Cylinder to be ordered separately
series 08710 or 0E300 (ASIX)




Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers. Spec.




<ul style="list-style-type: none"> • Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. - upper adjustment 650 mm. - lower adjustment 150 mm. • 10.5 to 16.5 mm. adjustable latch and piston • Nylon spacers • 12 V ac CE • ON REQUEST: - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 	3	1	85	24	25	3,500	1	1	16425	25	0			
	3	1	85	24	30	3,500	1	1	16425	30	0			
	3	1	85	24	35	3,500	1	1	16425	35	0			
	<ul style="list-style-type: none"> • Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 1.920 mm. - lower adjustment 150 mm. • 10.5 to 16.5 mm. adjustable latch and piston • 3 lateral dead-bolts • 12 V ac CE • ON REQUEST: - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 	3	1	85	24	25	3,380	1	1	16600	25	0		
		3	1	85	24	30	3,400	1	1	16600	30	0		
		3	1	85	24	35	3,420	1	1	16600	35	0		
	<ul style="list-style-type: none"> • Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. - upper adjustment 350 mm. - lower adjustment 150 mm. • 10.5 to 16.5 mm. adjustable latch and piston • 3 lateral dead-bolts • 12 V ac CE • ON REQUEST: - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 	3	1	85	24	25	3,780	1	1	16625	25	0		
		3	1	85	24	30	3,800	1	1	16625	30	0		
		3	1	85	24	35	3,820	1	1	16625	35	0		

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 3 lateral dead-bolts
- Nylon spacers
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0

3	1	-	24	25	3,600	1	1	46420	25	0
3	1	-	24	30	3,620	1	1	46420	30	0
3	1	-	24	35	3,640	1	1	46420	35	0



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 3 lateral dead-bolts
- Nylon spacers
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0



3	1	85	24	25	3,500	1	1	46425	25	0
3	1	85	24	30	3,500	1	1	46425	30	0
3	1	85	24	35	3,500	1	1	46425	35	0


- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 1.920 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0

3	1	85	24	25	3,200	1	1	46600	25	0
3	1	85	24	30	3,220	1	1	46600	30	0
3	1	85	24	35	3,240	1	1	46600	35	0

- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm.
- upper adjustment 350 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0


3	1	85	24	25	3,000	1	1	46625	25	0
3	1	85	24	30	3,000	1	1	46625	30	0
3	1	85	24	35	3,640	1	1	46625	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.




- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 2 lateral dead-bolts
- Top extended bolt
- Nylon spacers
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0

2	1	85	24	25	3,400	1	1	46435	25	0		
2	1	85	24	30	3,420	1	1	46435	30	0		
2	1	85	24	35	3,440	1	1	46435	35	0		




- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch and piston
- 1 lateral dead-bolt
- Vertical extended bolts
- Nylon spacers
- ON REQUEST:
 - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0
 - Floor striker item 1.06086.00.0
 - Floor striker with sprung dust cover item 1.06086.02.0

1	1	85	24	25	3,500	1	1	46445	25	0		
1	1	85	24	30	3,500	1	1	46445	30	0		
1	1	85	24	35	3,240	1	1	46445	35	0		

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> • Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm. - upper adjustment 650 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts • Nylon spacers • ON REQUEST: <ul style="list-style-type: none"> - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 - Floor striker item 1.06086.00.0 - Floor striker with sprung dust cover item 1.06086.02.0 	3	1	-	24	25	3,600	1	1	46450	25	0
		3	1	-	24	30	3,500	1	1	46450	30	0
		3	1	-	24	35	3,640	1	1	46450	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 1.920 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts • ON REQUEST: <ul style="list-style-type: none"> - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 	3	1	-	24	25	3,200	1	1	46605	25	0
		3	1	-	24	30	3,220	1	1	46605	30	0
		3	1	-	24	35	3,240	1	1	46605	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm. - upper adjustment 350 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts • ON REQUEST: <ul style="list-style-type: none"> - Adjustable striking plate item 1.06400.00.0 or item 1.06401.00.0 	3	1	-	24	25	3,600	1	1	46650	25	0
		3	1	-	24	30	3,620	1	1	46650	30	0
		3	1	-	24	35	3,640	1	1	46650	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ac CE


3	1	85	24	25	3,500	1	1	16525	25	0
3	1	85	24	30	3,500	1	1	16525	30	0
3	1	85	24	35	3,500	1	1	16525	35	0

- Stainless steel adjustable flat faceplate 24 x 7 mm., 1.920 mm.
- lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ac CE

3	1	85	24	25	3,380	1	1	16700	25	0
3	1	85	24	30	3,400	1	1	16700	30	0
3	1	85	24	35	3,420	1	1	16700	35	0




- Stainless steel adjustable flat faceplate 24 x 7 mm., 2.300 mm.
- upper adjustment 350 mm.
- lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ac CE


3	1	85	24	25	3,780	1	1	16725	25	0
3	1	85	24	30	3,800	1	1	16725	30	0
3	1	85	24	35	3,820	1	1	16725	35	0



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 3 lateral dead-bolts
- Nylon spacers

3	1	-	24	25	3,600	1	1	46520	25	0
3	1	-	24	30	3,620	1	1	46520	30	0
3	1	-	24	35	3,640	1	1	46520	35	0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
									Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm. - upper adjustment 650 mm. - lower adjustment 150 mm. • 11 to 17 mm. adjustable latch • 3 lateral dead-bolts • Nylon spacers 	3	1	85	24	25	3,600	1	1	46525	25	0
		3	1	85	24	30	3,500	1	1	46525	30	0
		3	1	85	24	35	3,500	1	1	46525	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable flat faceplate 24 x 3 mm., 1.920 mm. - lower adjustment 150 mm. • 11 to 17 mm. adjustable latch • 3 lateral dead-bolts 	3	1	85	24	25	3,200	1	1	46700	25	0
		3	1	85	24	30	3,220	1	1	46700	30	0
		3	1	85	24	35	3,240	1	1	46700	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable flat faceplate 24 x 3 mm., 2.300 mm. - upper adjustment 350 mm. - lower adjustment 150 mm. • 11 to 17 mm. adjustable latch • 3 lateral dead-bolts 	3	1	85	24	25	3,600	1	1	46725	25	0
		3	1	85	24	30	3,620	1	1	46725	30	0
		3	1	85	24	35	3,640	1	1	46725	35	0

	<ul style="list-style-type: none"> • Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm. - upper adjustment 650 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts • Nylon spacers 	3	1	-	24	25	3,500	1	1	46550	25	0
		3	1	-	24	30	3,500	1	1	46550	30	0
		3	1	-	24	35	3,500	1	1	46550	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable flat faceplate 24 x 3 mm., 1.920 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts 	3	1	-	24	25	3,200	1	1	46705	25	0
		3	1	-	24	30	3,220	1	1	46705	30	0
		3	1	-	24	35	3,240	1	1	46705	35	0
	<ul style="list-style-type: none"> • Stainless steel adjustable flat faceplate 24 x 3 mm., 2.300 mm. - upper adjustment 350 mm. - lower adjustment 150 mm. • 2.5 to 16.5 mm. adjustable roller • 3 lateral dead-bolts 	3	1	-	24	25	3,600	1	1	46750	25	0
		3	1	-	24	30	3,620	1	1	46750	30	0
		3	1	-	24	35	3,640	1	1	46750	35	0



MULTITOP

Technical features:

- Geared operating device for reducing key effort
- Patented system to avoid out of phase operations
- Zinc plated steel case
- Stainless steel faceplate
- Nickel-plated latch, roller and horizontal-slide dead-bolt
- Latch or reversible latch/bolt (where this is provided for)
- Can be fitted with additional locking points
- Through-screws for fixing the handle rose

- Threaded pins for fixing the extended bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Specific striking plates
- Cylinder protective rose item 1.06460.05.0 or item 1.06460.06.0

Hand:

0 = Non-handed


Cylinder to be ordered separately series 08710 or 0E300 (ASIX)



Supplied as standard:


- Set of nylon roses item 1.06012.01.0
- Set of nylon faceplate spacers item 1.06141.65.0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM			
								Type	Dim.	Hand	Fin. Peris. Spec.




- Dead-bolt and latch
- 10.5 to 16.5 mm. adjustable latch and piston
- 12 V ac CE
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0

2	85	22	25	0,920	1	1	18225	25	0		
2	85	22	30	0,970	1	1	18225	30	0		
2	85	22	35	0,990	1	1	18225	35	0		



- Dead-bolt only
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0


2	-	22	25	0,640	12	1	48220	25	0		
2	-	22	30	0,720	12	1	48220	30	0		
2	-	22	35	0,740	12	1	48220	35	0		



- Dead-bolt and latch
- 11 to 17 mm. adjustable latch
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0

2	85	22	25	0,700	12	1	48225	25	0		
2	85	22	30	0,750	12	1	48225	30	0		
2	85	22	35	0,820	12	1	48225	35	0		

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM				
							Type	Dim.	Hand	Fin.	Pers. Spec.



- Dead-bolt and roller
- 2.5 to 16.5 mm. adjustable roller
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0

2	-	22	25	0,700	12	1	48250	25	0	
2	-	22	30	0,750	12	1	48250	30	0	
2	-	22	35	0,800	12	1	48250	35	0	



MULTITOP

Technical features:

- Geared operating device for reducing key effort
- Patented system to avoid out of phase operations
- Zinc plated steel case
- Can be fitted with 4th and 5th locking points
- Nickel-plated latch, roller and horizontal-slide dead-bolt
- Latch or reversible latch/bolt (where this is provided for)
- Through-screws for fixing the handle rose

Supplied as standard:

- Set of nylon roses 1.06012.01.0
- Nylon faceplate cover plugs
- Lock and cylinder fixing screws
- Instruction sheet

On request:

- Specific striking plates
- Extended bolts for 4th and 5th locking points item 1.06449.10/11
- Threaded pin for extended bolts with external rods item 1.06449.05.0
- Cylinder protective rose item 1.06460.05.0 or 1.06460.06.0


Hand:

0 = Non-handed

Cylinder to be ordered separately series 08710 or OE300 (ASIX)




Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight	Pieces	ITEM			
									Type	Dim. Hand	Fin.	Pers. Spec.



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ac CE


3	2	85	24	25	3,460	1	1	18425 25 0
3	2	85	24	30	3,480	1	1	18425 30 0
3	2	85	24	35	3,820	1	1	18425 35 0

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 3 lateral dead-bolts

3	2	-	24	25	3,380	1	1	48420	25	0		
3	2	-	24	30	3,420	1	1	48420	30	0		
3	2	-	24	35	3,640	1	1	48420	35	0		




- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts

- Stainless steel adjustable U-shaped faceplate 24 x 7 mm., 2.300 mm.
- upper adjustment 350 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts

3	2	85	24	25	3,250	1	1	48425	25	0		
3	2	85	24	30	3,320	1	1	48425	30	0		
3	2	85	24	35	3,300	1	1	48425	35	0		
3	2	85	24	25	3,250	1	1	48625	25	0		
3	2	85	24	30	3,250	1	1	48625	30	0		
3	2	85	24	35	3,300	1	1	48625	35	0		


Type	Description	Locking points Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim. Hand	Fin.	Per. Spec.



- Black lacquered steel adjustable U-shaped faceplate 24 x 7 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral dead-bolts


3	2	-	24	25	3,240	1	1	48450	25	0		
3	2	-	24	30	3,280	1	1	48450	30	0		
3	2	-	24	35	3,320	1	1	48450	35	0		

Type	Description	Locking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 10.5 to 16.5 mm. adjustable latch and piston
- 3 lateral dead-bolts
- 12 V ac CE


3	2	85	24	25	3,520	1	1	18525	25	0
3	2	85	24	30	3,590	1	1	18525	30	0
3	2	85	24	35	3,660	1	1	18525	35	0



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 3 lateral dead-bolts

3	2	.	24	25	3,600	1	1	48520	25	0
3	2	.	24	30	3,620	1	1	48520	30	0
3	2	.	24	35	3,640	1	1	48520	35	0

Type	Description	Lacking points	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.




- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts

3	2	85	24	25	3,360	1	1	48525	25	0
3	2	85	24	30	3,440	1	1	48525	30	0
3	2	85	24	35	3,520	1	1	48525	35	0

- Stainless steel adjustable flat faceplate 24 x 3 mm., 2.300 mm.
- upper adjustment 630 mm.
- lower adjustment 150 mm.
- 11 to 17 mm. adjustable latch
- 3 lateral dead-bolts

3	2	85	24	25	3,360	1	1	48725	25	0
3	2	85	24	30	3,440	1	1	48725	30	0
3	2	85	24	35	3,520	1	1	48725	35	0



- Black lacquered steel adjustable flat faceplate 24 x 3 mm., 2.600 mm.
- upper adjustment 650 mm.
- lower adjustment 150 mm.
- 2.5 to 16.5 mm. adjustable roller
- 3 lateral dead-bolts

3	2	-	24	25	3,350	1	1	48550	25	0
3	2	-	24	30	3,400	1	1	48550	30	0
3	2	-	24	35	3,440	1	1	48550	35	0



MULTITOP

Technical features:

- Geared operating device for reducing key effort
- Patented system to avoid out of phase operations
- Lock modularity with additional locking points, 06444 series
- Zinc plated steel case
- Stainless steel faceplate
- Nickel-plated horizontal-slide dead-bolts with hardened steel inserts
- Nickel-plated latch and roller
- Latch or reversible latch/bolt (where this is provided for)
- Through-screws for fixing the handle rose

Supplied as standard:

- Set of nylon roses item 1.06012.0.10
- Nylon faceplate cover plugs
- Threaded pins for fixing the extended bolts
- Lock and cylinder fixing screws
- Instruction sheet

On request:


- Specific striking plates
- Cylinder protective rose item 1.06460.05.0 or 1.06460.06.0

Hand:
0 = Non-handed

Cylinder to be ordered separately series 08710 or 0E300 (ASIX)



Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin.




- U-shaped faceplate 24 x 5 mm.
- Latch and dead-bolt
- 10.5 to 16.5 mm. adjustable latch and piston
- 12 V ac CE
- ON REQUEST:
 - Lateral bolts item 1.06444.15/16/17
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0

2	92	24	25	0,950	1	1	18128	25	0
2	92	24	30	0,970	1	1	18128	30	0
2	92	24	35	0,990	1	1	18128	35	0

- U-shaped faceplate 24 x 7 mm.
- Latch and dead-bolt
- 10.5 to 16.5 mm. adjustable latch and piston
- 12 V ac CE
- ON REQUEST:
 - Lateral bolts item 1.06444.10/11/12
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0

2	92	24	25	0,950	1	1	18129	25	0
2	92	24	30	0,970	1	1	18129	30	0
2	92	24	35	0,990	1	1	18129	35	0










- U-shaped faceplate 24 x 5 mm.
- Dead-bolt only
- ON REQUEST:
 - Lateral bolts item 1.06444.15/16/17
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0






2	-	24	25	0,700	1	1	48123	25	0
2	-	24	30	0,720	1	1	48123	30	0
2	-	24	35	0,740	1	1	48123	35	0

- U-shaped faceplate 24 x 7 mm.
- Dead-bolt only
- ON REQUEST:
 - Lateral bolts item 1.06444.10/11/12
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.20.0
 - Extended bolts operated by external rods item 1.06443.25.0

2	-	24	25	0,700	1	1	48124	25	0
2	-	24	30	0,720	1	1	48124	30	0
2	-	24	35	0,740	1	1	48124	35	0

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM					
								Type	Dim.	Hand	Fin.	Peris. Spec.	
	• U-shaped faceplate 24 x 5 mm.	2	92	24	25	0,780	1	1	48128	25	0		
	• Latch and dead-bolt	2	92	24	30	0,800	1	1	48128	30	0		
	• 11 to 17 mm. adjustable latch	2	92	24	35	0,820	1	1	48128	35	0		
	• ON REQUEST:												
	- Lateral bolts item 1.06444.15/16/17												
	- Internal ragged extended bolts item 1.06441.00.0												
	- Internal straight extended bolts item 1.06441.10.0												
	- External bolt connectors item 1.06442.00.0												
	- Extended bolts operated by internal rods item 1.06443.20.0												
	- Extended bolts operated by external rods item 1.06443.25.0												
	• U-shaped faceplate 24 x 5 mm.	2	-	24	25	0,760	1	1	48153	25	0		
	• Roller latch and dead-bolt	2	-	24	30	0,780	1	1	48153	30	0		
	• 2.5 to 16 mm. adjustable roller latch	2	-	24	35	0,800	1	1	48153	35	0		
	• ON REQUEST:												
	- Lateral bolts item 1.06444.15/16/17												
	- Internal ragged extended bolts item 1.06441.00.0												
	- Internal straight extended bolts item 1.06441.10.0												
	- External bolt connectors item 1.06442.00.0												
	- Extended bolts operated by internal rods item 1.06443.20.0												
	- Extended bolts operated by external rods item 1.06443.25.0												
	• U-shaped faceplate 24 x 7 mm.	2	-	24	25	0,760	1	1	48154	25	0		
	• Roller latch and dead-bolt	2	-	24	30	0,780	1	1	48154	30	0		
	• 2.5 to 16 mm. adjustable roller latch	2	-	24	35	0,800	1	1	48154	35	0		
	• ON REQUEST:												
	- Lateral bolts item 1.06444.10/11/12												
	- Internal ragged extended bolts item 1.06441.00.0												
	- Internal straight extended bolts item 1.06441.10.0												
	- External bolt connectors item 1.06442.00.0												
	- Extended bolts operated by internal rods item 1.06443.20.0												
	- Extended bolts operated by external rods item 1.06443.25.0												
	• Set of modular lateral bolts with 24 x 7 mm. U-shaped faceplate	2	-	24	-	2,050	1	1	06444	10	0		
	• Pre-arranged for 4th and 5th locking points												
	• ON REQUEST:												
	Threaded rod item 1.06449.05.0 for extended bolts (4th and 5th locking point)												
	• Set of modular lateral bolts with 24 x 5 mm. U-shaped faceplate	2	-	24	-	1,950	1	1	06444	15	0		
	• Pre-arranged for 4th and 5th locking points												
	• ON REQUEST:												
	Threaded rod item 1.06449.05.0 for extended bolts (4th and 5th locking point)												

Type	Description	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM							
							Type	Dim.	Hand	Fin.	Pers. Spec.			
	<ul style="list-style-type: none"> • Modular top lateral bolt with 24 x 7 mm. U-shaped faceplate • Pre-arranged for 4th locking point • ON REQUEST: - threaded rod item 1.06449.05.0 for extended bolt 	2	-	24	-	0,825	1	1	06444	11	0			
	<ul style="list-style-type: none"> • Modular top lateral bolt with 24 x 5 mm. U-shaped faceplate • Pre-arranged for 4th locking point • ON REQUEST: - threaded rod item 1.06449.05.0 for extended bolt 	2	-	24	-	1,002	2	1	06444	16	0			
	<ul style="list-style-type: none"> • Modular bottom lateral bolt with 24 x 7 mm. U-shaped faceplate • Pre-arranged for 5th locking point • ON REQUEST: threaded rod item 1.06449.05.0 for extended bolt 	2	-	24	-	0,675	1	1	06444	12	0			
	<ul style="list-style-type: none"> • Modular bottom lateral bolt with 24 x 5 mm. U-shaped faceplate • Pre-arranged for 5th locking point • ON REQUEST: - threaded rod item 1.06449.05.0 for extended bolt 	2	-	24	-	0,900	2	1	06444	17	0			

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
								Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Flat faceplate 24 x 3 mm. • Latch and dead-bolt • 2.5 to 16.5 mm. adjustable latch and piston • 12 V ac CE • ON REQUEST: Lateral bolts item 1.06444.20/21/22 Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.00.0 Extended bolts operated by external rods item 1.06443.05.0 	2	92	24	25	0,950	1	1	18229	25	0	
		2	92	24	30	0,970	1	1	18229	30	0	
		2	92	24	35	0,990	1	1	18229	35	0	
	<ul style="list-style-type: none"> • Flat faceplate 24 x 3 mm. • Dead-bolt only • ON REQUEST: Lateral bolts item 1.06444.20/21/22 Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.20.0 Extended bolts operated by external rods item 1.06443.25.0 	2	-	24	25	0,700	1	1	48224	25	0	
		2	-	24	30	0,720	1	1	48224	30	0	
		2	-	24	35	0,740	1	1	48224	35	0	
	<ul style="list-style-type: none"> • Flat faceplate 24 x 3 mm. • Latch and dead-bolt • 11 to 17 mm. adjustable latch • ON REQUEST: Lateral bolts item 1.06444.20/21/22 Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.20.0 Extended bolts operated by external rods item 1.06443.25.0 	2	92	24	25	0,780	1	1	48229	25	0	
		2	92	24	30	0,800	1	1	48229	30	0	
		2	92	24	35	0,820	1	1	48229	35	0	
	<ul style="list-style-type: none"> • Flat faceplate 24 x 3 mm. • Roller latch and dead-bolt • 2.5 to 16.5 mm. adjustable roller latch • ON REQUEST: Lateral bolts item 1.06444.20/21/22 Internal ragged extended bolts item 1.06441.00.0 Internal straight extended bolts item 1.06441.10.0 External bolt connectors item 1.06442.00.0 Extended bolts operated by internal rods item 1.06443.20.0 Extended bolts operated by external rods item 1.06443.25.0 	2	-	24	25	0,760	1	1	48254	25	0	
		2	-	24	30	0,780	1	1	48254	30	0	
		2	-	24	35	0,800	1	1	48254	35	0	
	<ul style="list-style-type: none"> • Set of modular lateral bolts with 24 x 3 mm. flat faceplate • Pre-arranged for 4th and 5th locking points • ON REQUEST: Threaded rod item 1.06449.05.0 for extended bolts (4th and 5th locking point) 	2	-	24		2,100	1	1	06444	20	0	

Type	Description	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.



- Modular top lateral bolt with 24 x 3 mm. flat faceplate
- Pre-arranged for 4th locking point
- ON REQUEST:
Threaded rod item 1.06449.05.0 for extended bolt

2 - 24 0,825 2 **1 06444 21 0**



- Modular bottom lateral bolt with 24 x 3 mm. flat faceplate
- Pre-arranged for 5th locking point
- ON REQUEST:
Threaded rod item 1.06449.05.0 for extended bolt

2 - 24 - 0,675 2 **1 06444 22 0**



Technical features:

- Case height 82 mm
- Zinc plated case
- Zinc plated faceplate
- Nickel-plated steel dead-bolt
- Nickel-plated, reversible latch and roller
- Drill resistant protection plate

- Nylon faceplate spacer
- Lock fixing screws
- Instruction sheet

On request:

- Specific striking plates









Hand:

0 = Non-handed

Supplied as standard:

- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0
- Set of escutcheon fixing screws:
 - length 60 mm for the version with key item 1.00100.00.0
 - length 75 mm for the version with key item 1.00102.00.0

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin. Peris. Spec.	
	• Dead-bolt and latch	 1 00100 00 1	4	67	25	70	1,150	12	1	57312	73	0	
	• Dead-bolt and latch	 1 00102 00 1	4	67	25	70	1,150	12	1	57312	71	0	
	• Dead-bolt and latch	 1 00100 00 1	4	67	25	70	1,226	12	1	57317	73	0	
	• Pre-arranged for additional locking points • ON REQUEST: - Internal ragged extended bolts item 1.06451.00.0 - Internal straight extended bolts item 1.06451.10.0 - External bolt connectors item 1.06452.05.0 - Extended bolts operated by internal rods item 1.06453.05.0	 1 00102 00 1	4	67	25	70	1,230	12	1	57317	71	0	
	• Dead-bolt and roller • 2 to 14.5 mm. adjustable roller	 1 00100 00 1	4	-	25	70	1,025	12	1	57320	73	0	

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight Kg	Pieces	ITEM				
									Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Dead-bolt and roller • 2 to 14.5 mm. adjustable roller • Pre-arranged for additional locking points • ON REQUEST: <ul style="list-style-type: none"> - Internal ragged extended bolts item 1.06451.00.0 - Internal straight extended bolts item 1.06451.10.0 - External bolt connectors item 1.06452.05.0 - Extended bolts operated by internal rods item 1.06453.05.0 	 1 00100 00 1	4	-	25	70	1,080	12	1	57325	73	0	
		 1 00102 00 1	4	-	25	70	1,100	12	1	57325	71	0	
	<ul style="list-style-type: none"> • Dead-bolt only • Without drill resistant plate 	 1 00100 00 1	4	-	25	70	1,075	12	1	57330	73	0	
		 1 00100 00 1	4	-	25	70	1,140	12	1	57335	73	0	
	<ul style="list-style-type: none"> • Dead-bolt only • Pre-arranged for additional locking points • Without drill resistant plate • ON REQUEST: <ul style="list-style-type: none"> - Internal ragged extended bolts item 1.06451.00.0 - Internal straight extended bolts item 1.06451.10.0 - External bolt connectors item 1.06452.05.0 - Extended bolts operated by internal rods item 1.06453.05.0 	 1 00102 00 1	4	-	25	70	1,030	12	1	57335	71	0	



Technical features:

- Case height 78 mm
- Zinc plated case
- Stainless steel faceplate
- Nickel-plated steel dead-bolt
- Nickel-plated roller and reversible latch
- Drill resistant protection plate
- Electrical and mechanical versions are interchangeable

Supplied as standard:

- 3 keys item 1.00100.00.0 or item 1.00102.00.0
- Set of nylon key guide escutcheons item 1.06123.03.0
- Rose fastening screws:
- length 60 mm for the version with key item 1.00100.00.0

- length 75 mm for the version with key item 1.00102.00.0

- Set of nylon faceplate spacers item 1.06141.65.0
- Threaded extended bolts connectors
- Lock fixing screws
- Instruction sheet


On request:

- Specific striking plates

Hand:

0 = Non-handed

Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Kg	Pieces	ITEM			
									Type	Dim.	Hand	Fin.




- Dead-bolt and latch
- 12 to 18 mm. adjustable latch and piston
- Dead-locking latch
- Hold-open latch
- 12 V ac CE



1 00100 00 1

4	67	22	90	1,330	1	1 17352 90 0
4	67	22	100	1,385	1	1 17352 10 0




- Dead-bolt and latch
- 12 to 18 mm. adjustable latch and piston
- Dead-locking latch
- Hold-open latch
- Pre-arranged for additional locking points
- Threaded pivots for fixing extended bolts
- 12 V ac CE
- ON REQUEST:



1 00100 00 1









4	67	22	90	1,400	1	1 17357 90 0
4	67	22	100	1,463	1	1 17357 10 0

- Internal ragged extended bolts item 1.06441.00.0
- Internal straight extended bolts item 1.06441.10.0
- External bolt connectors item 1.06442.00.0
- Extended bolts operated by internal rods item 1.06443.00.0
- Extended bolts operated by external rods item 1.06443.05.0




1 00102 00 1

4	67	22	90	1,410	1	1 17357 91 0
4	67	22	100	1,450	1	1 17357 11 0

Type	Description	Key item	Throws	Centre Distance	Faceplate Backset	Unit weight Kg	Pieces	ITEM			
								Type	Dim.	Hand	Fin. Pers. Spec.
 <ul style="list-style-type: none"> • Dead-bolt and latch • 11 to 17 mm. adjustable latch 		 1 00100 00 1	4	67	22 90	1,210	12	1	57352	90	0
			4	67	22 100	1,316	12	1	57352	10	0
		 1 00102 00 1	4	67	22 90	1,145	12	1	57352	91	0
			4	67	22 100	1,150	12	1	57352	11	0
 <ul style="list-style-type: none"> • Dead-bolt and latch • 11 to 17 mm. adjustable latch • Pre-arranged for additional locking points • Threaded pivots for fixing extended bolts • ON REQUEST: <ul style="list-style-type: none"> - Internal ragged extended bolts item 1.06441.00.0 - Internal straight extended bolts item 1.06441.10.0 - External bolt connectors item 1.06442.00.0 - Extended bolts operated by internal rods item 1.06443.00.0 - Extended bolts operated by external rods item 1.06443.05.0 		 1 00100 00 1	4	67	22 90	1,275	12	1	57357	90	0
			4	67	22 100	1,340	12	1	57357	10	0
		 1 00102 00 1	4	67	22 90	1,305	12	1	57357	91	0
			4	67	22 100	1,355	12	1	57357	11	0
 <ul style="list-style-type: none"> • Dead-bolt and roller • 2 to 14.5 mm. adjustable roller 		 1 00100 00 1	4	-	22 90	1,145	12	1	57360	90	0
			4	-	22 100	1,120	12	1	57360	10	0


Type	Description	Key item	Throws	Centre Distance	Faceplate	Backset	Unit weight 	Pieces 	ITEM				
									Type	Dim.	Hand	Fin.	Peris. Spec.




- Dead-bolt and roller
- 2 to 14.5 mm. adjustable roller
- Pre-arranged for additional locking points
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0



1 00100 00 1	4	-	22	90	1,225	12	1 57365 90 0
	4	-	22	100	1,250	12	1 57365 10 0




1 00102 00 1	4	-	22	90	1,230	12	1 57365 91 0
	4	-	22	100	1,100	12	1 57365 11 0



- Dead-bolt only




1 00100 00 1	4	-	22	90	1,129	12	1 57370 90 0
	4	-	22	100	1,168	12	1 57370 10 0



- Dead-bolt only
- Pre-arranged for additional locking points
- Threaded pivots for fixing extended bolts
- ON REQUEST:
 - Internal ragged extended bolts item 1.06441.00.0
 - Internal straight extended bolts item 1.06441.10.0
 - External bolt connectors item 1.06442.00.0
 - Extended bolts operated by internal rods item 1.06443.00.0
 - Extended bolts operated by external rods item 1.06443.05.0



1 00100 00 1	4	-	22	90	1,185	12	1 57375 90 0
	4	-	22	100	1,250	12	1 57375 10 0



1 00102 00 1	4	-	22	90	1,106	12	1 57375 91 0
	4	-	22	100	1,151	12	1 57375 11 0











Technical features:




- Stainless steel case
- Special stainless zinc alloy body
- Transversally adjustable striker, by 2 mm
- Hold-open device
- Hold-open catch mechanism
- 12 V ac CE




- 1 = R.H. inwards
- L.H. outwards
- 2 = L.H. inwards
- R.H. outwards

Supplied as standard:


- No. 2 nylon, 3 mm faceplate spacers
- Instruction sheet

Type	Description	Faceplate	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
 	<ul style="list-style-type: none"> • Flat faceplate 25 x 3 mm. • External non-repeating device with spring-operated rod • For locks with latch: <ul style="list-style-type: none"> - series 44600, 46000, 48000, 57300 • ON REQUEST: <ul style="list-style-type: none"> - faceplate spacer from 3 mm. item 1.06141.84.0 	25	0,338	1	1	15020	00	1	
		25	0,320	1	1	15020	00	2	
 	<ul style="list-style-type: none"> • Flat faceplate 34 x 2 mm. • External non-repeating device with spring-operated rod • For locks with latch: <ul style="list-style-type: none"> - series 44600, 46000, 48000, 57300 • ON REQUEST: <ul style="list-style-type: none"> - faceplate spacer from 3 mm. item 1.06141.85.0 	34	0,350	1	1	15021	00	1	
		34	0,350	1	1	15021	00	2	
 	<ul style="list-style-type: none"> • Flat faceplate 25 x 3 mm. • Built-in non-repeating device • For locks with latch: <ul style="list-style-type: none"> - series 44600, 46000, 48000, 57300 • ON REQUEST: <ul style="list-style-type: none"> - faceplate spacer from 3 mm. item 1.06141.84.0 	25	0,338	1	1	15030	00	1	
		25	0,338	1	1	15030	00	2	

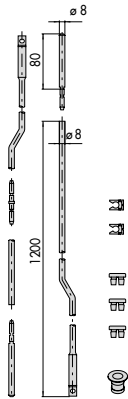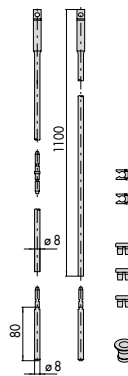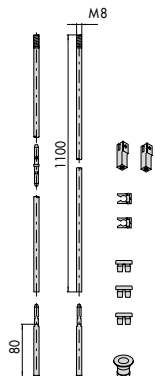Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> • Zinc plated cranked internal extended bolts • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of 8 mm. diameter rods - Set of 8 mm. single rods item 1.06291.06.0 - Floor striker item 1.06086.01.0 - Joining pin item 1.06291.20.0 - Set of guide rods item 1.06224.00.0 - Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 18128, 18225, 18229, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46262, 46265, 46270, 46272, 46275, 48123, 48128, 48153, 48220, 48224, 48225, 48229, 48250, 48254, 57357, 57365, 57375	0,610	12	1	06441	00	0	
	<ul style="list-style-type: none"> • Zinc plated straight internal extended bolts • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of 8 mm. diameter rods - Set of 8 mm. single rods item 1.06291.06.0 - Floor striker item 1.06086.01.0 - Joining pin item 1.06291.20.0 - Set of guide rods item 1.06224.00.0 - Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 18128, 18225, 18229, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46262, 46265, 46270, 46272, 46275, 48123, 48128, 48153, 48220, 48224, 48225, 48229, 48250, 48254, 57357, 57365, 57375	0,566	12	1	06441	10	0	
	<ul style="list-style-type: none"> • Zinc plated straight internal extended bolts with screws • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of 8 mm. diameter rods - Set of 8 mm. single rods item 1.06291.06.0 - Floor striker item 1.06086.01.0 - Set of threaded bushes (M8) item 1.06290.05.0 - Joining pin item 1.06291.20.0 - Set of guide rods item 1.06224.00.0 - Noise proof bushes item 1.06147.00.0 	16225, 16227, 17357, 18128, 18225, 18229, 46220, 46222, 46225, 46250, 46252, 46260, 46262, 46270, 46272, 48123, 48128, 48153, 48220, 48224, 48225, 48229, 48250, 48254, 57357, 57365, 57375	0,630	12	1	06441	20	0	

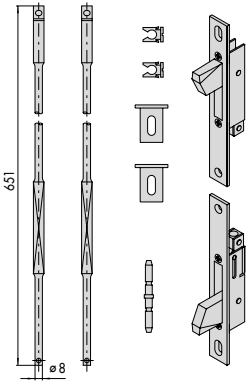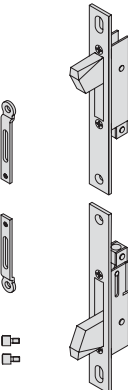Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of controls for external extended bolts 	16225, 16227, 17357, 18225, 18229, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46262, 46265, 46270, 46272, 46275, 48220, 48224, 48225, 48229, 48250, 48254, 57357, 57365, 57375	0,020	12	1	06442	00	0
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by internal rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods diameter 8 mm. - Set of faceplate spacers item 1.06141.65.0 - Set of guide rods item 1.06224.00.0 • Pin connector item 1.06291.20.0 • ON REQUEST: <ul style="list-style-type: none"> - Special striking plates (see Vademecum) - Personalised internal extended bolts item 1.06449.00.0 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46262, 46265, 46270, 46272, 46275, 57357, 57365, 57375	0,854	12	1	06443	00	0
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by external rods • Swing bolts • 22 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of external bolt connectors - Set of threaded rods • ON REQUEST: <ul style="list-style-type: none"> - Special striking plates (see Vademecum) 	16225, 16227, 17357, 46200, 46220, 46222, 46225, 46227, 46250, 46252, 46260, 46262, 46265, 46270, 46272, 46275, 57357, 57365, 57375	0,513	12	1	06443	05	0


Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.

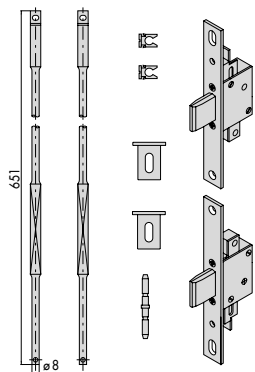

- Set of lateral extended bolts operated by internal rods
- Horizontal slide bolts with hardened steel inserts
- 22 x 3 mm. stainless steel faceplate
- Pre-arranged for 4th and 5th locking points
- SUPPLIED AS STANDARD:
 - Set of rods diameter 8 mm.
 - Set of faceplate spacers item 1.06141.65.0
 - Set of guide rods item 1.06224.00.0
 - Pin connector item 1.06291.20.0
- ON REQUEST:
 - Special striking plates (see Vademecum)
 - Internal straight extended bolts item 1.06441.10.0 for 4th and 5th locking points
 - Threaded rod for fixing extended bolts item 1.06449.05.0
 - Personalised internal extended bolts item 1.06449.00.0

18128, 18225, 18229, 48123, 48128, 48153, 48220, 48224, 48225, 48229, 48250, 48254


0,835 12 1 06443 20 0



- Set of lateral extended bolts operated by external rods
- Horizontal slide bolts with hardened steel inserts
- 22 x 3 mm. stainless steel faceplate
- Pre-arranged for 4th and 5th locking points
- SUPPLIED AS STANDARD:
 - External bolt connectors
 - Set of threaded rods
- ON REQUEST:
 - Special striking plates (see Vademecum)
 - Threaded rod for fixing extended bolts item 1.06449.05.0

18225, 18229, 48220, 48224, 48225, 48229, 48250, 48254




0,646 12 1 06443 25 0









- Internal extended bolts for personalising lateral locking point distance
- SUPPLIED AS STANDARD:
 - Set of rods diameter 8 mm.
 - Set of pins for fixing rods to lateral extended bolts

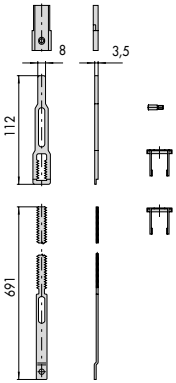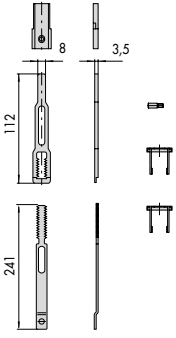
1 06443 00 0, 1 06443 20 0

0,495 12 1 06449 00 0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> Threaded rod for fixing extended bolts for 4th and 5th locking points 	1 06443 20 0, 1 06443 25 0, 18525, 48520, 48525, 48550	0,002	50	1	06449	05	0
	<ul style="list-style-type: none"> Additional TOP extended bolt to match: - U-shaped faceplate locks - Flat faceplate locks (exclusive to profile R 50) SUPPLIED AS STANDARD: - Rod - Hardened steel rod - Guide casing - Threaded rod item 1.06449.05.0 - Faceplate nylon cover 	18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550	0,187	6	1	06449	10	0
	<ul style="list-style-type: none"> Additional FLOOR extended bolt to match: - U-shaped faceplate locks - Flat faceplate locks (exclusive to profile R 50) SUPPLIED AS STANDARD: - Rod - Hardened steel rod - Guide casing - Threaded rod item 1.06449.05.0 - Faceplate nylon cover 	18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550	0,135	6	1	06449	11	0

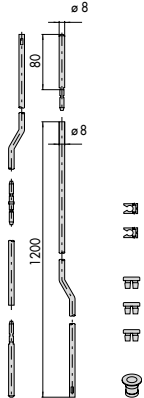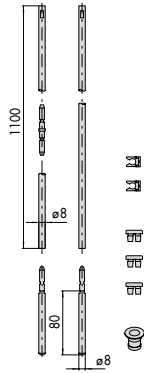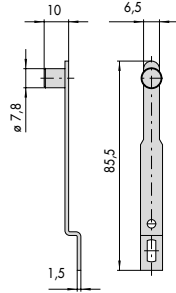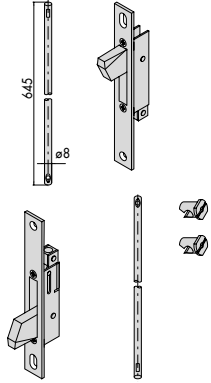
Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim. Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Zinc plated internal cranked extended bolts • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods diameter 8 mm. - Set of rods diameter 8 mm. item 1.06291.06.0 - Floor striker item 1.06086.01.0 - Joining pin item 1.06291.20.0 - Set of guide rods item 1.06224.00.0 - Noise proof bushes item 1.06147.00.0 	57317,57325, 57335	0,620	12	1	06451	00	0
	<ul style="list-style-type: none"> • Zinc plated internal straight extended bolts • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods diameter 8 mm. - Set of rods diameter 8 mm. item 1.06291.06.0 - Floor striker item 1.06086.01.0 - Joining pin item 1.06291.20.0 - Set of guide rods item 1.06224.00.0 - Noise proof bushes item 1.06147.00.0 	57317,57325, 57335	0,575	12	1	06451	10	0
	<ul style="list-style-type: none"> • Set of controls for external extended bolts 	57317,57325, 57335	0,034	12	1	06452	05	0
	<ul style="list-style-type: none"> • Set of lateral extended bolts operated by internal rods • Swing bolts • 25 x 3 mm. stainless steel faceplate • SUPPLIED AS STANDARD: <ul style="list-style-type: none"> - Set of rods diameter 8 mm. - Set of guide rods item 1.06224.00.0 • ON REQUEST: <ul style="list-style-type: none"> - Special striking plates (see Vademecum) - Personalised internal rod extended bolts item 1.06419.10.0 	57317,57325, 57335	0,865	12	1	06453	05	0

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.














- Internal extended bolts for adjusting the distance of lateral locking points
- SUPPLIED AS STANDARD:
 - Set of 8 mm. diameter rods
 - Set of pins for fixing bolts onto lateral extended bolts












1 06453 05 0 0,605 12 1 06419 10 0












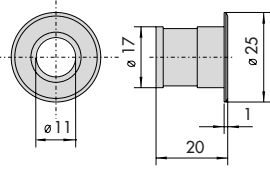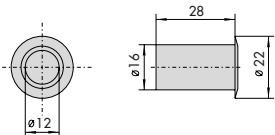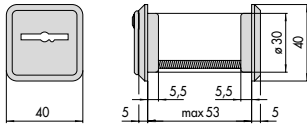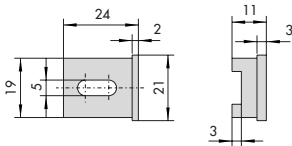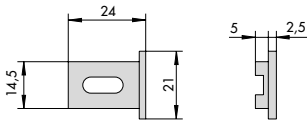






- Set of zinc plated internal extended bolts with screws
- SUPPLIED AS STANDARD:
 - Set of rods diameter 8 mm.
 - Set of rods diameter 8 mm. item 1.06291.06.0
 - Floor striker item 1.06086.01.0
 - Joining pin item 1.06291.20.0
 - Set of guide rods item 1.06224.00.0
 - Noise proof bushes item 1.06147.00.0
 - Set of threaded bushes item 1.06290.00.0




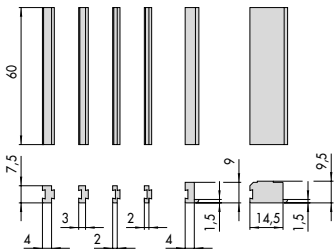
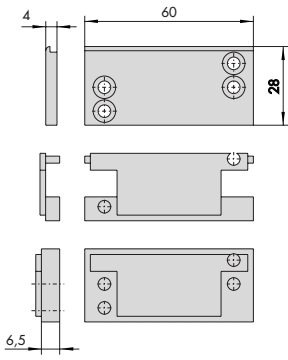
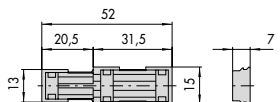

57317,57325, 57335 0,604 12 1 07088 00 0









Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Black nylon rose	02400	0,001	100	1	06002	00	0	
	• Set of black nylon roses for European profile cylinders		0,004	100	1	06012	01	0	
	• Set of black nylon roses for oval cylinders		0,004	100	1	06027	01	0	
	• Nickel-plated steel screw • ON REQUEST: Brass plated steel (fin. 28)	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,017	50	1	06048	00	0	
	• Nickel-plated steel screw • ON REQUEST: Brass plated steel (fin. 28)	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,004	50	1	06048	01	0	
	• Nickel-plated steel screw • ON REQUEST: Brass plated steel (fin. 28)	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,006	50	1	06048	02	0	
	• Nickel-plated steel screw • ON REQUEST: Brass plated steel (fin. 28)	1 06119 00 0, 1 06123 00 1, 1 06123 03 0, 1 06123 04 0, 1 06142 00 0, 1 06142 02 0	0,008	50	1	06048	03	0	
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,050	25	1	06077	16	0	
	• Zinc plated steel flat striker	44220, 44221, 44225, 44226	0,070	25	1	06077	20	0	










Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,052	25	1	06078	16	0	
	• Zinc plated steel flat striker	44230, 44231, 44235, 44236	0,070	25	1	06078	20	0	
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,030	25	1	06079	16	0	
	• Zinc plated steel flat striker	44240, 44241, 44245, 44246	0,045	25	1	06079	20	0	
	• Zinc plated steel flat striker	44360, 44361, 44460, 44461	0,037	25	1	06079	77	0	
	• Zinc plated steel flat striker	44237, 44238	0,025	25	1	06080	16	0	
	• Zinc plated steel flat striker	44237, 44238	0,034	25	1	06080	20	0	
	• Brass floor striker diameter 11 mm. • FOR: - extended bolts with rods diameter 10 mm.		0,016	12	1	06086	00	0	
	• Brass floor striker, diameter 9 mm. • USED FOR: - Internal extended bolts with 8 mm. diameter rods		0,013	12	1	06086	01	0	
	• Brass floor striker with spring dust-cover, diameter 12 mm. • USED FOR: - Internal extended bolts with 8 mm. diameter rods multi-point locks series 46445 - Extended bolt for Multitop item 1.06449.11.0		0,020	12	1	06086	02	0	
	• Nylon push-button for electric locks		0,020	12	1	06110	10	0	








Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Set of chrome-plated brass key guides • AVAILABLE FINISHES: Polished brass (fin. 67) 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,038	5	1	06123	00	1
	<ul style="list-style-type: none"> • Set of nylon key guides 	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	5	1	06123	03	0
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (8 mm.) for Alpha and Esedra Doors Shops profiles • Fitting both mid-rail horizontal locks and narrow frame upright locks 		0,010	25	1	06141	52	0
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (2 mm.) 	44200, 44600	0,002	25	1	06141	53	0
	<ul style="list-style-type: none"> • Nylon roller insert for striking plates of locks series 44600 		0,003	25	1	06141	55	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer (2.5 mm.) for mid-rail locks with 16 and 20 mm. faceplate 		0,011	25	1	06141	57	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer (5 mm.) for locks with 16 and 20 mm. faceplate 		0,016	25	1	06141	63	0
	<ul style="list-style-type: none"> • Set of nylon faceplate spacers (5 mm.) for locks and upright locks 		0,003	25	1	06141	65	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer (3 mm.) for locks with 16 and 20 mm. faceplate 		0,010	25	1	06141	66	0
	<ul style="list-style-type: none"> • Nylon faceplate spacer (3 mm.) for locks with 16 and 20 mm. faceplate 		0,010	25	1	06141	67	0








Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	• Set of nylon faceplate spacers (3 mm.)	16200, 17000, 18200, 46200, 48200, 57000	0,005	25	1	06141	68	0
	• Set of nylon faceplate spacers (2 mm.)	16200, 17000, 18200, 46200, 48200, 57000	0,001	25	1	06141	69	0
	• Nylon roller insert	1 06463 04 0, 1 06463 06 0, 1 06463 07 0, 1 06463 14 0, 1 06463 16 0, 1 06463 17 0, 1 06465 04 0, 1 06465 06 0, 1 06465 07 0	0,004	12	1	06141	70	0
	• Nylon roller insert	1 06463 05 0, 1 06463 08 0, 1 06463 09 0, 1 06463 15 0, 1 06463 18 0, 1 06463 19 0, 1 06465 02 0, 1 06465 03 0, 1 06465 05 0	0,003	12	1	06141	71	0
	• Nylon cover for Ekip Blindo profile	1 06463 09 0, 1 06463 19 0, 1 06465 03 0	0,008	12	1	06141	72	0
	• Nylon cover for DOUBLE-LEAF Ekip 50 door profile	1 06463 05 0, 1 06463 15 0, 1 06465 05 0	0,010	12	1	06141	74	0
	• Nylon roller insert	1 06141 39 0, 1 06141 40 0, 1 06141 41 0, 1 06141 42 0, 1 06141 43 0, 1 06141 44 0, 1 06141 45 0, 1 06141 46 0, 1 06141 47 0	0,002	12	1	06141	75	0









Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nylon roller insert 	1 06285 30 0, 1 06285 32 0, 1 06285 34 0, 1 06285 36 0, 1 06285 38 0, 1 06285 40 0, 1 06285 42 0	0,002	12	1 06141 76 0				
	<ul style="list-style-type: none"> Striking plate spacer (1,5 mm.) 	1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06465 04 0, 1 06465 08 0, 1 06465 14 0	0,005	25	1 06141 77 0				
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	16200, 18200, 46200, 48200	0,020	12	1 06141 78 0				
	<ul style="list-style-type: none"> Nylon cover for thermal cut profiles 	1 06141 40 0, 1 06285 36 0, 1 06463 04 0, 1 06463 14 0, 1 06465 04 0, 1 06465 14 0	0,019	25	1 06141 79 0				
	<ul style="list-style-type: none"> Upper striker for extended bolt Black nylon 	1 07089 52 0	0,022	25	1 06141 80 0				
	<ul style="list-style-type: none"> Nylon roller insert 	1 06278 06 0, 1 06278 28 0	0,002	25	1 06141 82 0				
	<ul style="list-style-type: none"> Set of nylon faceplate spacers (5 mm.) for profile R35, for band locks and upright locks 		0,004	25	1 06141 83 0				

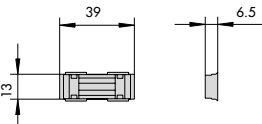

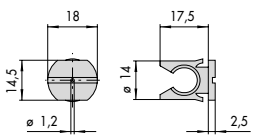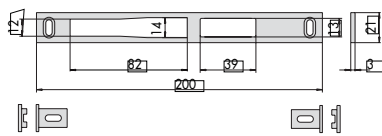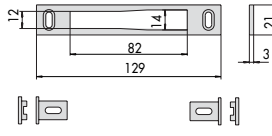
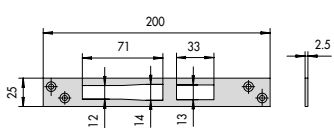
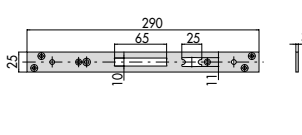
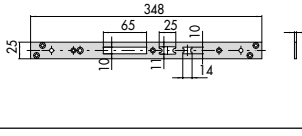
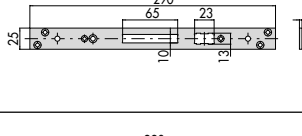
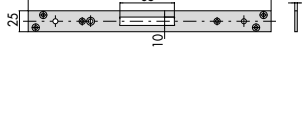

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM		
					Type	Dim. Hand Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	15020, 15030	0,012	25	1	06141	84 0
	<ul style="list-style-type: none"> Nylon faceplate spacer (3 mm.) 	15021	0,025	25	1	06141	85 0
	<ul style="list-style-type: none"> Nylon roller insert 	1 06232 05 0, 1 06461 30 0, 1 06461 35 0, 1 06461 40 0, 1 06461 45 0	0,002	12	1	06141	86 0
	<ul style="list-style-type: none"> Set of additional spacers for cylinder protection roses for profiles wider than 63 mm. Spacers from 2 mm. (11 pieces) Screws M5 x 110 mm. (2 pieces) 	1 06460 05 0, 1 06460 06 0	0,145	1	1	06141	87 0
	<ul style="list-style-type: none"> Noise proof bushes for bolts - diameter 8.5 mm. (2 pieces) - diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,004	25	1	06147	00 0
	<ul style="list-style-type: none"> Noise proof bushes for bolts diameter 10 mm. (1 piece) 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,001	100	1	06147	01 0
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	44620, 44621, 44625, 44626, 44640, 44645	0,096	25	1	06157	00 0
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	44630, 44635	0,100	25	1	06167	00 0



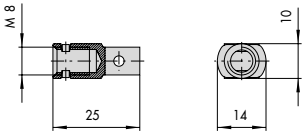





Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin. Peris. Spec.
	<ul style="list-style-type: none"> Nylon guide rod 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06443 00 0, 1 06443 20 0, 1 06451 00 0, 1 06451 10 0, 1 06453 05 0, 1 07088 00 0	0,003	25	1 06224 00 0			
	<ul style="list-style-type: none"> Zinc plated steel flat striker Includes a pair of spacers item 1.06141.65.0 	44600, 46000	0,069	25	1 06232 05 0			
	<ul style="list-style-type: none"> Zinc plated steel flat striker Includes a pair of spacers item 1.06141.65.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0	0,069	25	1 06232 06 0			
	<ul style="list-style-type: none"> Zinc-plated steel faceplate 	46215, 46217, 46225, 46227	0,069	25	1 06232 20 0			
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46215, 46217, 46225, 46227	0,141	12	1 06233 00 0			
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	16215, 16217, 16225, 16227	0,160	12	1 06233 01 0			
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46230, 46232, 46250, 46252	0,130	12	1 06233 02 0			
	<ul style="list-style-type: none"> Stainless steel faceplate (25 mm.) 	46200, 46210, 46212, 46220, 46222, 46240, 46242, 46260, 46262, 46265	0,144	12	1 06233 03 0			
	<ul style="list-style-type: none"> Set of threaded bushes (M5) in nylon 	1 07088 00 0, 57317, 57325, 57335	0,010	12	1 06290 00 0			

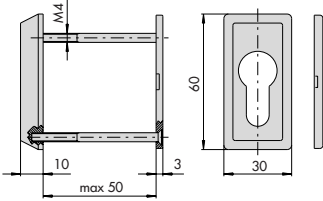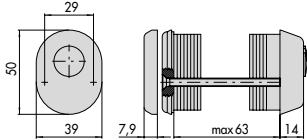

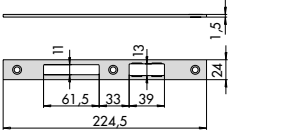


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Set of threaded bushes (M8) in metal 	1 06441 20 0, 17358,46320, 46322,57358, 57378	0,050	12	1	06290	05	0	
	<ul style="list-style-type: none"> Pair of threaded steel bushings (M8), anti-unscrewing 	46300,46302, 46365,46375, 56016,57016, 57035,57226, 57318,57336	0,025	25	1	06290	10	0	
	<ul style="list-style-type: none"> Zinc plated steel saw resistant rod diameter 8 mm. Lateral push resistance KN 8 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,036	12	1	06291	01	0	
	<ul style="list-style-type: none"> Zinc plated hardened steel single-piece rod diameter 8 mm. Lateral push resistance KN 14 	1 06441 00 0, 1 06441 10 0, 1 06441 20 0, 1 06451 00 0, 1 06451 10 0, 1 07088 00 0	0,038	12	1	06291	06	0	
	<ul style="list-style-type: none"> Lock protection plate to increase drill resistance 	18128,18229, 48123,48128, 48153,48224, 48229,48254	0,100	6	1	06436	10	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200,46210, 46212,46220, 46222,46240, 46242,46260, 46262,46265, 46420,46520	0,057	12	1	06459	01	0	
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200,46210, 46212,46220, 46222,46240, 46242,46260, 46262,46265, 46420,46520	0,034	12	1	06459	02	0	

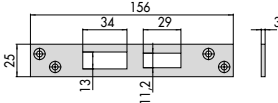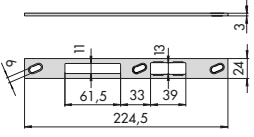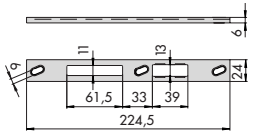Type	Description	For series/item	Unit weight		Pieces		ITEM							
			Kg				Type	Dim.	Hand	Fin.	Pers.	Spec.		
	<ul style="list-style-type: none"> Sinterised stainless steel cylinder protection rose 	16000, 46000	0,125		1	1	06460	00	0					
	<ul style="list-style-type: none"> Protection rose for cylinders RS3, ASTRAL (with long key, special execution CL), and ASIX, in chrome plated carbonitrited steel complete with: <ul style="list-style-type: none"> - spacers 2 mm. (16 pieces), 1 mm. (2 pieces) - screws M5 x 73 mm. - inside escutcheon AVAILABLE FINISHES: <ul style="list-style-type: none"> - gold polished steel (fin. 15) 	18000, 48000	0,485		1	1	06460	05	0					
			0,485		1	1	06460	05	0	15				
	<ul style="list-style-type: none"> Protection rose for cylinders SP and TSP ((with long key, special execution CL), in chrome plated carbonitrited steel complete with: <ul style="list-style-type: none"> - spacers 2 mm. (16 pieces), 1 mm. (2 pieces) - screws M5 x 73 mm. - inside escutcheon AVAILABLE FINISHES: <ul style="list-style-type: none"> - gold polished steel (fin. 15) 	18000, 48000	0,490		1	1	06460	06	0					
			0,485		1	1	06460	06	0	15				
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,082		12	1	06461	01	0					
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	46215, 46217, 46225, 46227, 46425, 46435, 46445, 46525, 46625, 46725	0,050		12	1	06461	02	0					
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	18128, 18225, 18229, 18425, 18525, 48128, 48225, 48229, 48425, 48525	0,053		12	1	06461	07	0					
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	48123, 48220, 48224, 48420, 48520	0,034		12	1	06461	08	0					


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM		
					Type	Dim. Hand Fin.	Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 1.5 mm. 	1 06444 15 0, 1 06444 20 0	0,037	12	1 06461 09 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	46230, 46232, 46250, 46252, 46450, 46550, 46650, 46750	0,085	12	1 06461 11 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	57320, 57325, 57360, 57365	0,075	12	1 06461 20 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 25 x 3 mm. 	57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,067	12	1 06461 21 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. For roller locks use nylon insert item 1.06141.86.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,093	12	1 06461 30 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. 	48123, 48220, 48224, 48420, 48520	0,065	12	1 06461 31 0		
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. 	1 06443 20 0, 1 06443 25 0, 1 06444 15 0, 1 06444 20 0	0,067	12	1 06461 32 0		
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,098	12	1 06461 35 0		

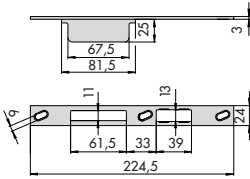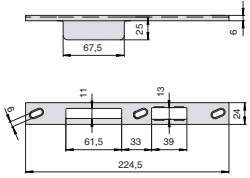Type	Description	For series/item	 Unit weight  Pieces	ITEM			
				Type	Dim.	Hand	Fin. Pers. Spec.
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 	48123, 48220, 48224, 48420, 48520	0,065 12	1	06461	36	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 	1 06443 20 0, 1 06443 25 0, 1 06444 15 0, 1 06444 20 0	0,072 12	1	06461	37	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. with dead-bolt protection case For roller locks use nylon insert item 1.06141.86.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,182 12	1	06461	40	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. with dead-bolt protection case 	48123, 48220, 48224, 48420, 48520	0,155 12	1	06461	41	0
	<ul style="list-style-type: none"> Stainless steel flat striking plate 24 x 3 mm. with dead-bolt protection case 	1 06443 20 0, 1 06443 25 0, 1 06444 15 0, 1 06444 20 0	0,151 12	1	06461	42	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. For roller locks use nylon insert item 1.06141.86.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,182 12	1	06461	45	0
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 	48123, 48220, 48224, 48420, 48520	0,162 12	1	06461	46	0

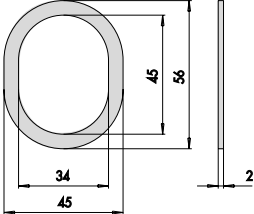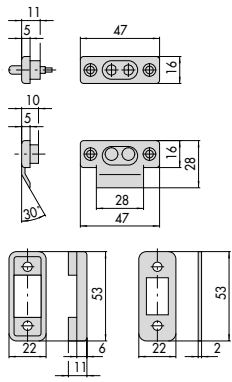Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers.
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 24 x 6 mm. 	1 06443 20 0, 1 06443 25 0, 1 06444 15 0, 1 06444 20 0	0,152	12	1 06461 47 0				
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 25 x 6 mm with nylon slide 	16205, 16207, 16215, 16217, 16225, 16227, 16425, 16435, 16445, 16525, 16625, 16725	0,077	12	1 06462 01 0				
	<ul style="list-style-type: none"> Stainless steel U-shaped striking plate 25 x 6 mm. 	17352, 17357, 57352, 57357, 57370, 57375	0,058	12	1 06462 20 0				
	<ul style="list-style-type: none"> Chrome plated outside covering ring 	1 06460 05 0, 1 06460 06 0	0,025	25	1 06473 60 0				
	<ul style="list-style-type: none"> Set of nylon contacts for electric locks complete with spacers: - 2 mm. (6 pieces) - 5 mm. (1 piece) 		0,047	6	1 06511 00 0				
	<ul style="list-style-type: none"> Set of coils • 12 V ac CE 	14010, 14011, 14012, 14013, 14017, 14018	0,030	6	1 07013 00 0				
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	44210	0,035	25	1 07027 00 0				
	<ul style="list-style-type: none"> Zinc plated steel flat striker 	45010, 45015, 45025, 45110	0,035	25	1 07028 00 0				

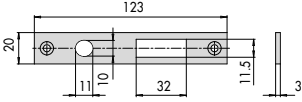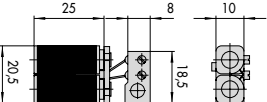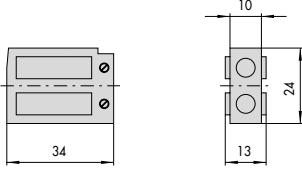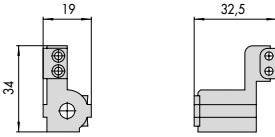
Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	• Brass flat striker	45100	0,035	25	1	07028	10	0	
	• Zinc plated steel flat striker	45012, 45017, 45027	0,040	25	1	07028	05	0	
	• Set of coils • 12 V ac CE	14020, 14021	0,027	6	1	07047	00	0	
	• Set of coils • 24 V ac CE	14020, 14021	0,027	6	1	07047	01	0	
	• Set of coils • 12 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1	07086	00	0	
	• Set of coils • 24 V ac CE	14350, 14351, 14352, 14450, 14451, 14452, 14460, 14461, 14462, 14510, 14511, 14512, 15500, 16000, 17500, 18000	0,035	6	1	07086	01	0	
	• Set of coils • 12 V ac CE	17352, 17353, 17357, 17358	0,035	6	1	07128	00	0	
	• Set of coils • 24 V ac CE	17352, 17353, 17357, 17358	0,035	6	1	07128	01	0	

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.

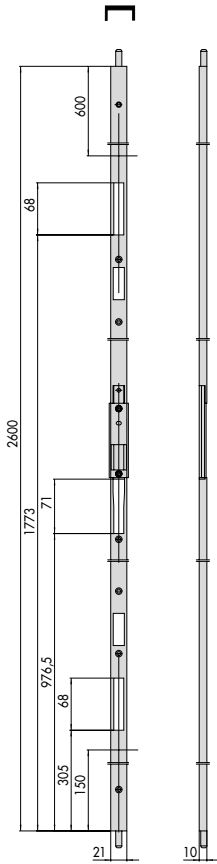





- FOR DOUBLE-LEAF DOORS
- Adjustable striking plate with 21 x 10 mm. U-shaped faceplate, black electrically coloured, height 2.600 mm.
 - top adjustment 650 mm.
 - bottom adjustment 150 mm.
- For use with locks with U-shaped faceplate
- Lateral adjustment
- Thickness adjustment
- Top/bottom locking points
- Top striker item 1.06141.80.0
- ON REQUEST:
 - floor striker item 1.06086.00.0
 - floor striker with dust cover item 1.06086.02.0





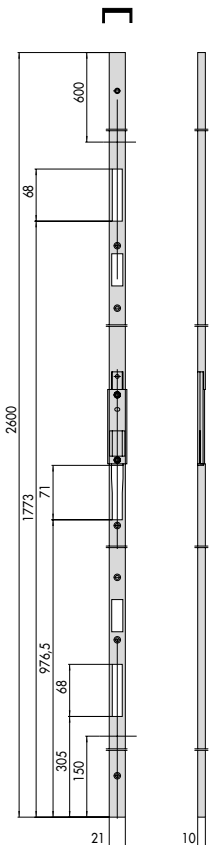
16425,16625, 1,100 1 1 06400 00 0
 46420,46425,
 46435,46445,
 46450,46625,
 46650











- FOR SINGLE-LEAF DOORS
- Adjustable striking plate with 21 x 10 mm. U-shaped faceplate, black electrically coloured, height 2.600 mm.
 - top adjustment 600 mm.
 - bottom adjustment 150 mm.
- For use with locks with U-shaped faceplate
- Lateral adjustment
- Thickness adjustment

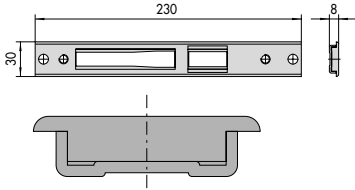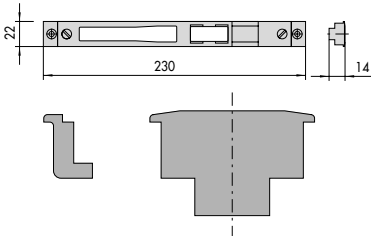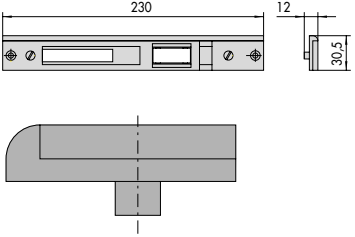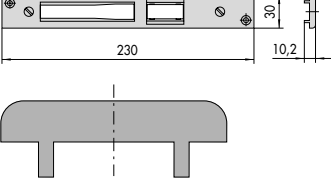
16425,16625, 0,840 1 1 06401 00 0
 46420,46425,
 46435,46445,
 46450,46625,
 46650


Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> • Lateral adjustment • Thickness adjustment • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,163	12	1	06463	04	0
	<ul style="list-style-type: none"> • Lateral adjustment • For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,173	12	1	06463	05	0
	<ul style="list-style-type: none"> • Lateral adjustment • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,174	12	1	06463	06	0
	<ul style="list-style-type: none"> • Lateral adjustment • For roller locks use nylon insert item 1.06141.70.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,160	12	1	06463	07	0

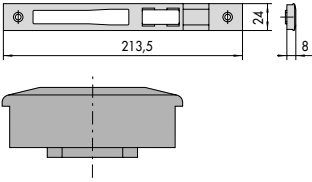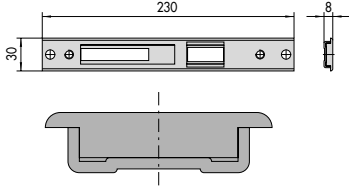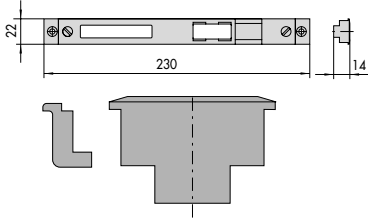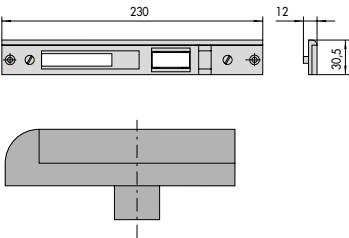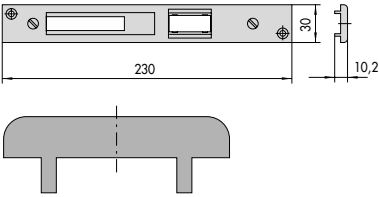Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hand	Fin.
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,150	12	1	06463	09	0
	<ul style="list-style-type: none"> Lateral adjustment Thickness adjustment For roller locks use nylon insert item 1.06141.70.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,172	12	1	06463	14	0
	<ul style="list-style-type: none"> Lateral adjustment Thickness adjustment For roller locks use nylon insert item 1.06141.71.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,190	12	1	06463	15	0
	<ul style="list-style-type: none"> Lateral adjustment Thickness adjustment For roller locks use nylon insert item 1.06141.70.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,180	12	1	06463	16	0
	<ul style="list-style-type: none"> Lateral adjustment For roller locks use nylon insert item 1.06141.70.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,170	12	1	06463	17	0

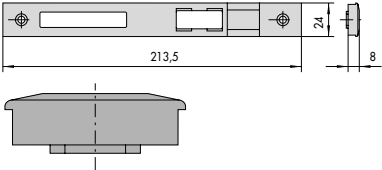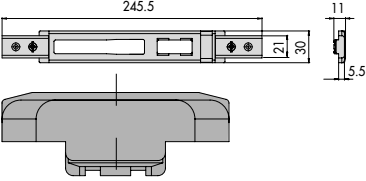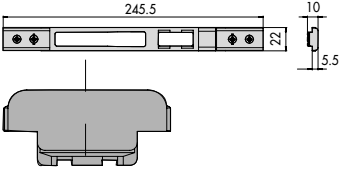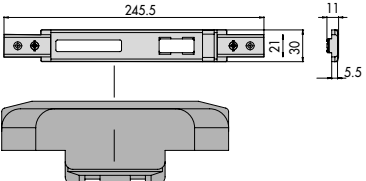Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,170	12	1	06463	19	0	
	<ul style="list-style-type: none"> Lateral adjustment For roller locks use nylon insert item 1.06141.71.0 PROFILES: R50TT, NEW TEC 52 SOR TT, etc. with outward opening 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,185	12	1	06463	21	0	
	<ul style="list-style-type: none"> REPLACES ITEM 1.06463.08.0 Lateral adjustment Central part in lacquered steel For roller locks use nylon insert item 1.06141.71.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46200, 46210, 46215, 46220, 46225, 46230, 46250, 46420, 46425, 46435, 46445, 46450, 46520, 46525, 46550, 46625, 46650, 46725, 46750	0,130	12	1	06463	22	0	
	<ul style="list-style-type: none"> IDEM Central part in stainless steel 		0,145	12	1	06463	23	0	
	<ul style="list-style-type: none"> Lateral adjustment For roller locks use nylon insert item 1.06141.71.0 PROFILES: R50TT, NEW TEC 52 SOR TT, etc. with outward opening 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,230	12	1	06463	31	0	

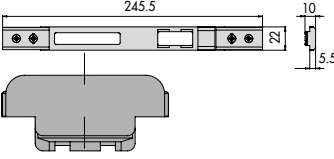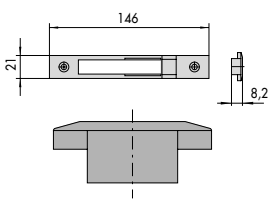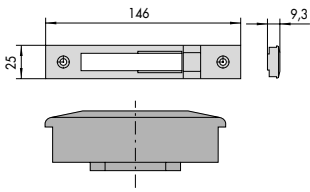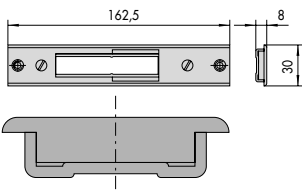
Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hard	Fin.
	<ul style="list-style-type: none"> REPLACES ITEM 1.06463.18.0 Lateral adjustment Central part in lacquered steel For roller locks use nylon insert item 1.06141.71.0 	18128, 18225, 18229, 18425, 18525, 48128, 48153, 48225, 48229, 48250, 48254, 48425, 48450, 48525, 48550	0,145	12	1	06463	32	0
	<ul style="list-style-type: none"> IDEM Central part in stainless steel 		0,145	12	1	06463	33	0
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520, 48123, 48220, 48224, 48420, 48520, 57330, 57335, 57370, 57375	0,053	12	1	06465	02	0
	<ul style="list-style-type: none"> For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 46520, 48123, 48220, 48224, 48420, 48520, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,108	12	1	06465	03	0
	<ul style="list-style-type: none"> Lateral adjustment Thickness adjustment For roller locks use nylon insert item 1.06141.70.0 	1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 46520, 48123, 48220, 48224, 48420, 48520, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,125	12	1	06465	04	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.




- Lateral adjustment
- For roller locks use nylon insert item 1.06141.71.0

1 06443 00 0,	0,125	12	1 06465 05 0
1 06443 05 0,			
1 06453 05 0,			
17352, 17357,			
46200, 46210,			
46220, 46420,			
46520, 48123,			
48220, 48224,			
48420, 48520,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			

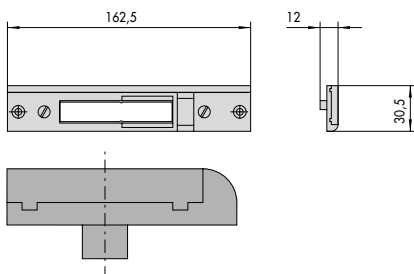


- Lateral adjustment
- For roller locks use nylon insert item 1.06141.70.0

1 06443 00 0,	0,122	12	1 06465 06 0
1 06443 05 0,			
1 06453 05 0,			
17352, 17357,			
46200, 46210,			
46220, 46420,			
46520, 48123,			
48220, 48224,			
48420, 48520,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			

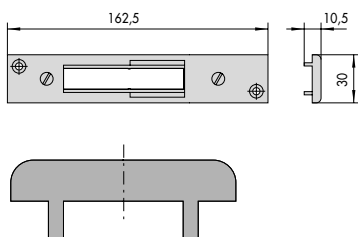







- Lateral adjustment
- For roller locks use nylon insert item 1.06141.70.0







1 06443 00 0,	0,117	12	1 06465 07 0
1 06443 05 0,			
1 06453 05 0,			
17352, 17357,			
46200, 46210,			
46220, 46420,			
46520, 48123,			
48220, 48224,			
48420, 48520,			
57312, 57317,			
57320, 57325,			
57330, 57335,			
57352, 57357,			
57360, 57365,			
57370, 57375			











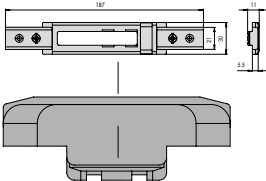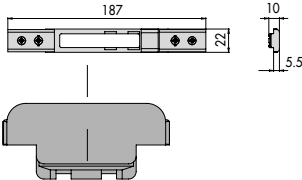







1 06443 00 0,	0,099	12	1 06465 08 0
1 06443 05 0,			
1 06453 05 0,			
46200, 46210,			
46220, 46420,			
46520			

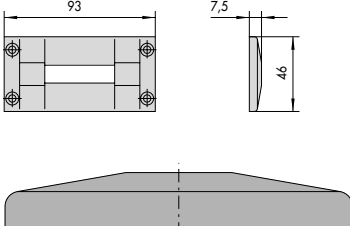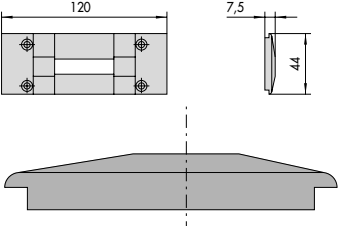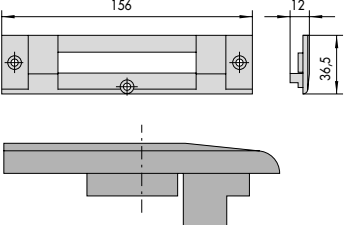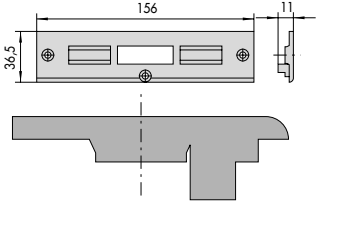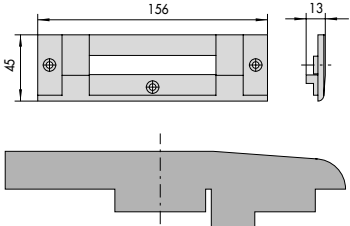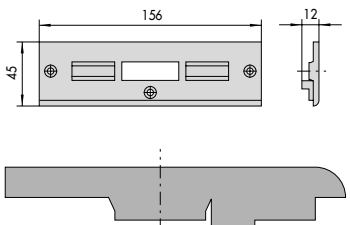

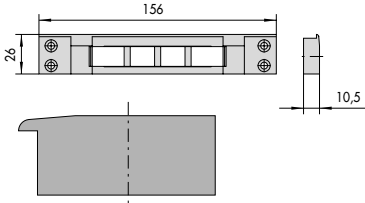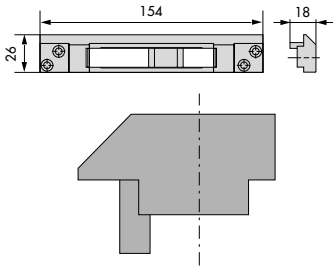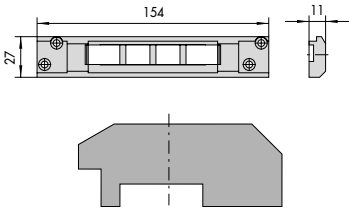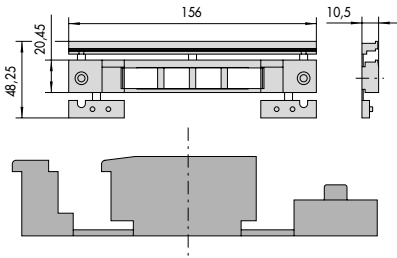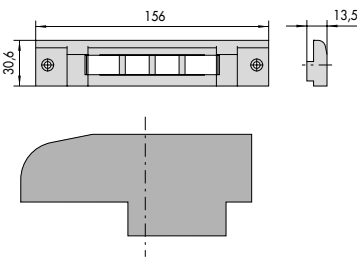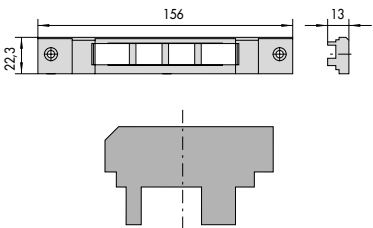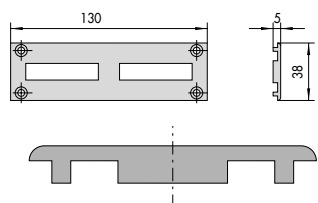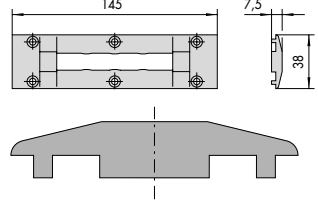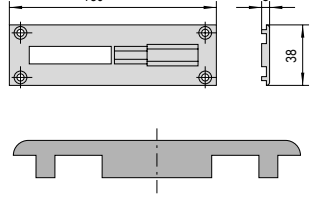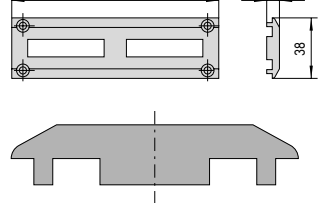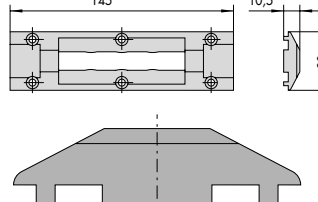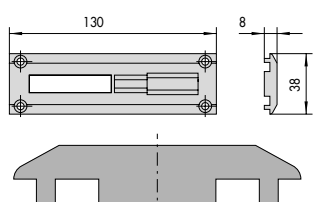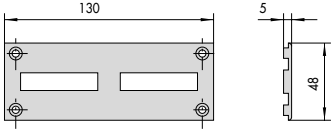

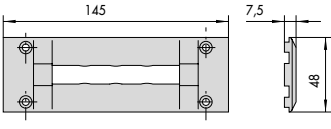

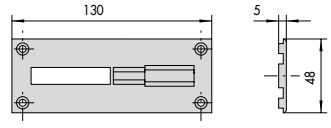

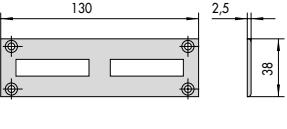



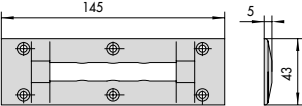



Type	Description	For series/item	Unit weight Kg	Pieces	ITEM			
					Type	Dim.	Hard	Fin.
		1 06443 00 0,	0,086	12	1	06465	09	0
		1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520						
		1 06443 00 0,	0,115	12	1	06465	10	0
		1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520						
	<ul style="list-style-type: none"> • Lateral adjustment • Thickness adjustment 	1 06443 20 0,	0,141	12	1	06465	14	0
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550						
	<ul style="list-style-type: none"> • Lateral adjustment 	1 06443 20 0,	0,115	12	1	06465	15	0
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550						
	<ul style="list-style-type: none"> • Lateral adjustment 	1 06443 20 0,	0,137	12	1	06465	16	0
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550						
	<ul style="list-style-type: none"> • Lateral adjustment 	1 06443 20 0,	0,133	12	1	06465	17	0
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425, 18525, 48420, 48425, 48450, 48520, 48525, 48550						









Type	Description	For series/item	Unit weight 	Pieces 	ITEM				
					Type	Dim.	Hand	Fin.	Pers. Spec.
	<ul style="list-style-type: none"> • Lateral adjustment • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R50TT, NEW TEC 52 SOR TT, etc. with outward opening 	1 06443 00 0,	0,140	12	1 06465 21 0				
		1 06443 05 0, 1 06453 05 0, 17352,17357, 46200,46210, 46220,46420, 46520,48123, 48220,48224, 48420,48520, 57312,57317, 57320,57325, 57330,57335, 57352,57357, 57360,57365, 57370, 57375							
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06465.02.0 • Lateral adjustment • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 	1 06443 00 0,	0,112	12	1 06465 22 0				
		1 06443 05 0, 1 06453 05 0, 17352,17357, 46200,46210, 46220,46420, 46520,48123, 48220,48224, 48420,48520, 57312,57317, 57320,57325, 57330,57335, 57352,57357, 57360,57365, 57370, 57375							
	<ul style="list-style-type: none"> • IDEM • Central part in stainless steel 		0,130	12	1 06465 23 0				
	<ul style="list-style-type: none"> • Lateral adjustment • For roller locks use nylon insert item 1.06141.71.0 • PROFILES: R50TT, NEW TEC 52 SOR TT, etc. with outward opening 	1 06443 20 0,	0,120	12	1 06465 31 0				
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425,18525, 48420,48425, 48450,48520, 48525, 48550							
	<ul style="list-style-type: none"> • REPLACES ITEM 1.06463.08.0 • Lateral adjustment • Central part in lacquered steel • For roller locks use nylon insert item 1.06141.71.0 • European camera profile 	1 06443 20 0,	0,110	12	1 06465 32 0				
		1 06443 25 0, 1 06444 15 0, 1 06444 20 0, 18425,18525, 48420,48425, 48450,48520, 48525, 48550							
	<ul style="list-style-type: none"> • IDEM • Central part in stainless steel 		0,110	12	1 06465 33 0				



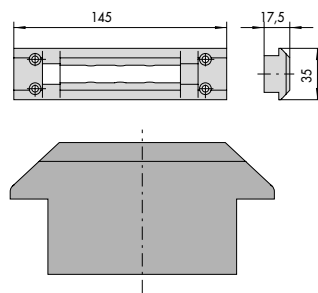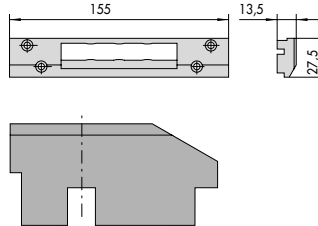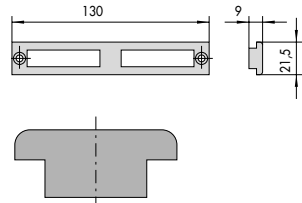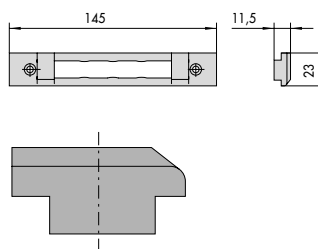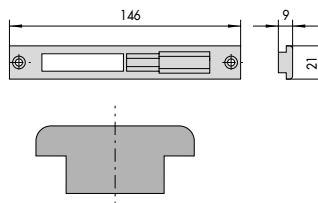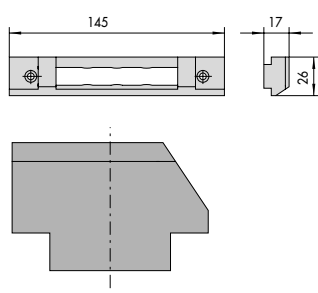

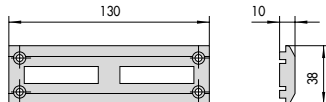

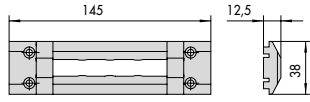
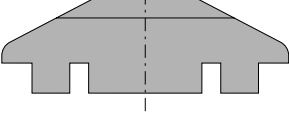
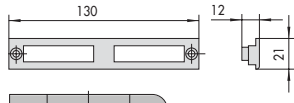

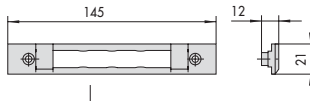

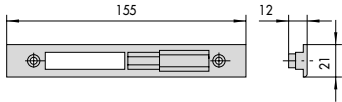

Type	Description	For series/item	Unit weight Kg	Pieces	ITEM				
					Type	Dim.	Hard	Fin.	Pers.
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44165, 44210, 44227, 44240, 44245, 44350, 44450	0,016	25	1	06062	00	0	
		14010, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44165, 44210, 44227, 44240, 44245, 44350, 44450	0,019	25	1	06072	00	0	
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 46420, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,024	25	1	06141	35	0	
		57320, 57325, 57360, 57365	0,030	25	1	06141	36	0	
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 17352, 17357, 46200, 46210, 46220, 57312, 57317, 57330, 57335, 57352, 57357, 57370, 57375	0,034	25	1	06141	37	0	
		57320, 57325, 57360, 57365	0,030	25	1	06141	38	0	

Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.
	<p>• For roller locks item 57320 - 57325 - 57360 - 57365 use nylon insert item 1.06141.75.0</p>	17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	1	06141	40	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	1	06141	41	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,025	25	1	06141	42	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	1	06141	43	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,029	25	1	06141	44	0
		17352, 17357, 57312, 57317, 57320, 57325, 57330, 57335, 57352, 57357, 57360, 57365, 57370, 57375	0,035	25	1	06141	46	0


Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		44220, 44221, 44225, 44226	0,014 25	1 06277 01 0
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,018 25	1 06277 02 0
		44130, 44230, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,030 25	1 06277 03 0
		44220, 44221, 44225, 44226	0,030 25	1 06277 10 0
		14460, 14461, 44120, 44121, 44360, 44361, 44460, 44461	0,026 25	1 06277 11 0
		44130, 44230, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,030 25	1 06277 12 0

Type	Description	For series/item	 Unit weight  Pieces	ITEM			
				Type	Dim.	Hand	Fin.
 		44220, 44225	0,030	25	1	06277	13 0
 		14460, 44120, 44360, 44460	0,021	25	1	06277	14 0
 		44130, 44230, 44235, 44237, 44370, 44470	0,030	25	1	06277	15 0
 		44221, 44226	0,015	25	1	06277	28 0
 		14461, 44121, 44361, 44461	0,030	25	1	06277	29 0
 		14461, 44121, 44361, 44461	0,018	25	1	06277	32 0
 		14461, 44121, 44361, 44461	0,030	25	1	06277	41 0

Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14461, 44121, 44361, 44461	0,030 25	1 06277 44 0
		14461, 44121, 44361, 44461	0,032 25	1 06277 71 0
		44219, 44221, 44224, 44226	0,012 25	1 06277 76 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,016 25	1 06277 77 0
		44131, 44231, 44236, 44238, 44371, 44471	0,016 25	1 06277 78 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030 25	1 06277 80 0

Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
 		44131, 44231, 44236, 44238, 44371, 44471	0,030	25	1	06277	81	0
 		44220, 44225	0,030	25	1	06277	82	0
 		14460, 44120, 44360, 44460	0,030	25	1	06277	83	0
 		44219, 44220, 44221, 44224, 44225, 44226	0,007	25	1	06277	88	0
 		14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,013	25	1	06277	89	0
 		44130, 44131, 44230, 44231, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,030	25	1	06277	90	0

Type	Description	For series/item	Unit weight 	Pieces 	ITEM Type Dim. Hard Fin. Pers. Spec.
------	-------------	-----------------	--	---	--





44221, 44226

0,030

25

1 06277 91 0





14461, 44121, 44361,
44461

0,030

25

1 06277 92 0





44219, 44220, 44221,
44224, 44225, 44226

0,030

25

1 06277 94 0





14460, 14461, 14462,
44120, 44121, 44360,
44361, 44362, 44460,
44461, 44462

0,030

25

1 06277 95 0




14461, 44121, 44361,
44461













0,027

25

1 06277 97 0



Type	Description	For series/item	Unit weight Kg	Pieces	ITEM	Type	Dim.	Hand	Fin.	Pers.	Spec.
	44131, 44231, 44236, 44238, 44371, 44471	0,048 12 1 06277 98 0									
	44221, 44226	0,023 25 1 06277 99 0									
	44219, 44220, 44221, 44224, 44225, 44226	0,019 25 1 06278 01 0									
	14460, 14461, 14462, 44120, 44121, 44360, 44361, 44362, 44460, 44461, 44462	0,022 25 1 06278 02 0									
	44130, 44131, 44230, 44231, 44235, 44236, 44237, 44238, 44370, 44371, 44470, 44471	0,020 25 1 06278 03 0									
	14011, 14013, 14018, 14021, 14351, 14451, 14461, 14511, 44111, 44116, 44121, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44361, 44451, 44461	0,020 25 1 06278 04 0									

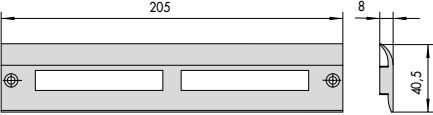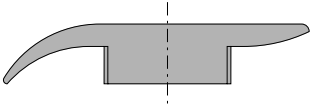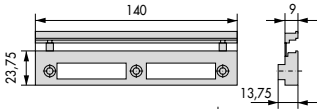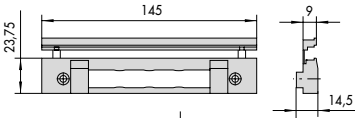Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers.
 		44131, 44231, 44236, 44238, 44371, 44471	0,017	25	1	06278	05	0
 	<ul style="list-style-type: none"> For roller locks item 44230 - 44235 - 44370 - 44470 use nylon insert item 1.06141.82.0 	44220, 44225, 44230, 44235, 44360, 44370, 44460, 44470	0,020	25	1	06278	06	0
 	<ul style="list-style-type: none"> For lock 1.52611.45.0.00.EN on round ABITHAL profile 		0,026	12	1	06278	07	0
 		44220, 44225	0,035	25	1	06278	16	0
 		14460, 44120, 44360, 44460	0,033	25	1	06278	17	0

Type	Description	For series/item	Unit weight	Pieces	ITEM			
					Type	Dim.	Hand	Fin.

	44130, 44230, 44235, 44237, 44370, 44470	0,035 12 1 06278 18 0
--	---	---------------------------------









	44131, 44231, 44236, 44238, 44371, 44471	0,025 25 1 06278 19 0
--	---	---------------------------------

	44221, 44226	0,025 25 1 06278 20 0
--	--------------	---------------------------------









	14461, 44121, 44361, 44461	0,026 25 1 06278 21 0
--	-------------------------------	---------------------------------

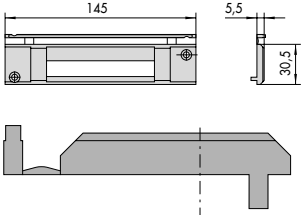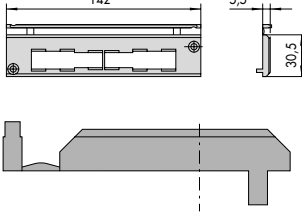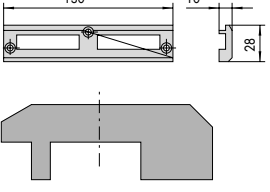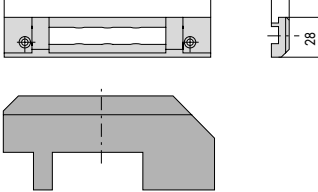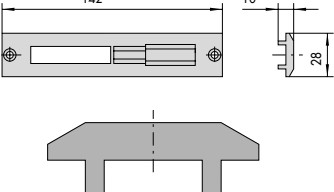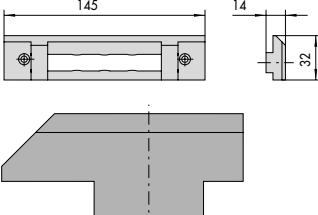






	44131, 44231, 44236, 44238, 44371, 44471	0,035 25 1 06278 22 0
--	---	---------------------------------








	44219, 44221, 44224, 44226	0,017 25 1 06278 26 0
--	-------------------------------	---------------------------------

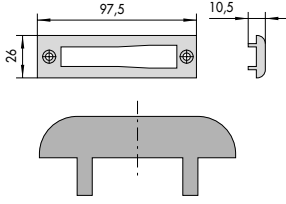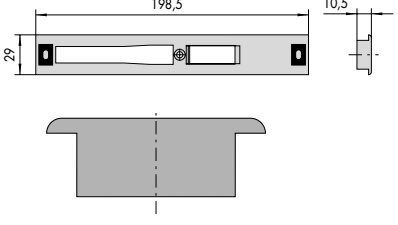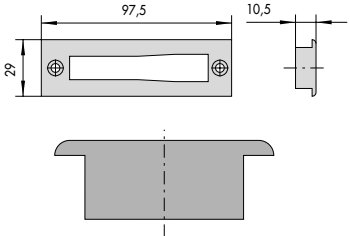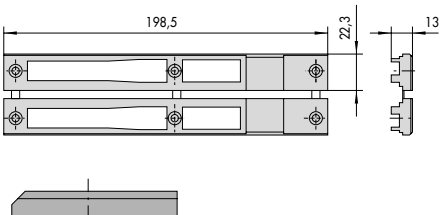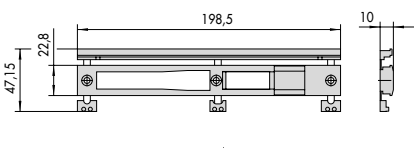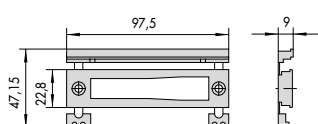






Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,022 25	1 06278 27 0
	• Use nylon roller insert item 1.06141.82.0	44131, 44231, 44236, 44238, 44371, 44471	0,030 25	1 06278 28 0
		44219, 44221, 44224, 44226	0,019 25	1 06278 64 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,021 25	1 06278 65 0
		44131, 44231, 44236, 44238, 44371, 44471	0,019 25	1 06278 66 0
		14461, 14462, 44121, 44361, 44362, 44461, 44462	0,030 25	1 06278 80 0

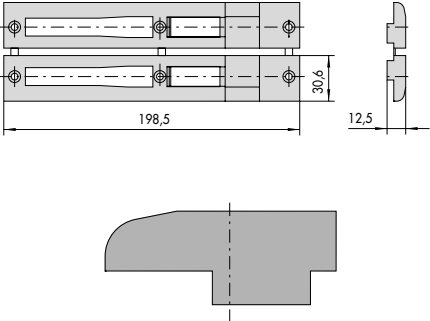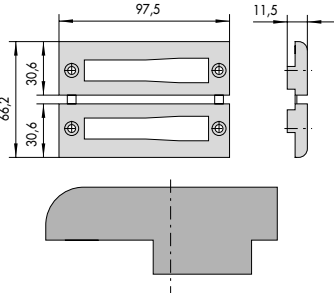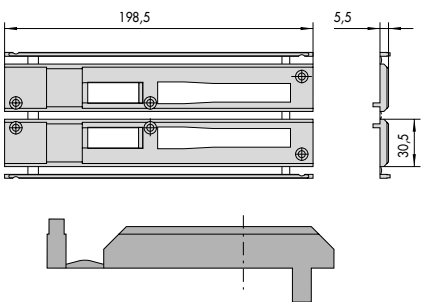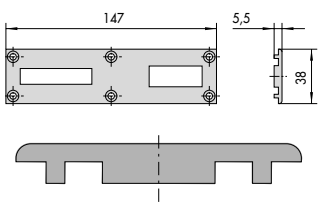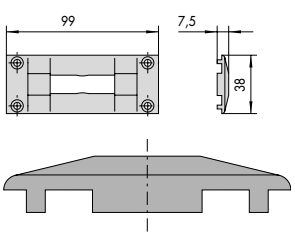






Type	Description	For series/item	Unit weight Kg	Pieces	ITEM	Type	Dim.	Hand	Fin.	Pers.	Spec.
	16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,025 25	1 06285 25 0								
	16205, 16215, 16225, 16425, 16625, 46215, 46225, 46425, 46435, 46445, 46625	0,035 12	1 06285 27 0								
	46230, 46250, 46450	0,030 25	1 06285 28 0								
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	0,026 12	1 06285 30 0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750							
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	0,035 12	1 06285 32 0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750							
	• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0	0,020 12	1 06285 34 0	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750							

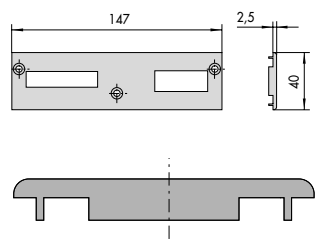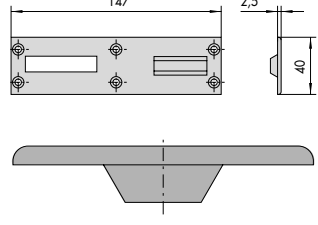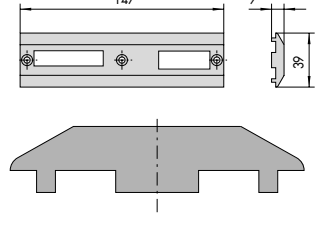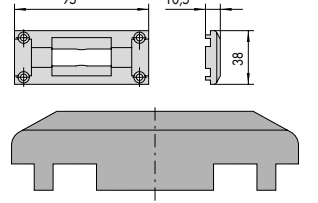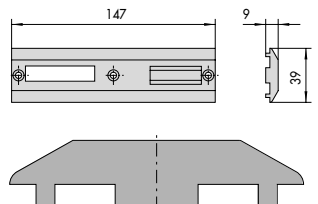Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030 25	1 06285 35 0
	<ul style="list-style-type: none"> • For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,030 12	1 06285 36 0
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,015 25	1 06285 37 0
	<ul style="list-style-type: none"> • For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0 	16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,048 6	1 06285 38 0
		16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750	0,035 12	1 06285 40 0
		1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520	0,030 25	1 06285 41 0


Type	Description	For series/item	Unit weight 	Pieces 	ITEM			
					Type	Dim.	Hand	Fin.
	<p>• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0</p>	<p>16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750</p>	0,072	6	1	06285	42	0
		<p>1 06443 00 0, 1 06443 05 0, 1 06453 05 0, 46200, 46210, 46220, 46420, 46520</p>	0,030	12	1	06285	43	0
	<p>• For roller locks item 46230 - 46250 - 46450 - 46550 - 46650 - 46750 use nylon insert item 1.06141.76.0</p>	<p>16205, 16215, 16225, 16425, 16525, 16625, 16725, 46215, 46225, 46230, 46250, 46425, 46435, 46445, 46450, 46525, 46550, 46625, 46650, 46725, 46750</p>	0,060	6	1	06285	44	0
		<p>44620, 44621, 44625, 44626, 44640, 44645</p>	0,030	25	1	06287	01	0
		<p>14010, 14011, 14012, 14013, 14017, 14018, 14020, 14021, 14350, 14351, 14450, 14451, 14510, 14511, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44155, 44156, 44160, 44161, 44165, 44166, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451</p>	0,014	25	1	06287	02	0

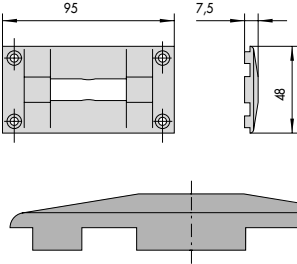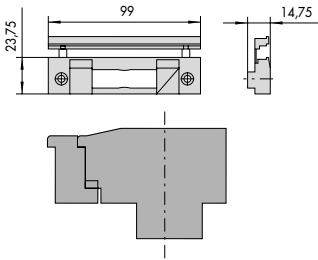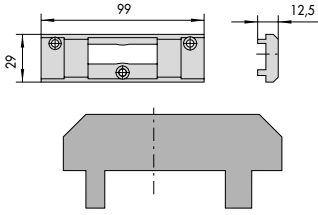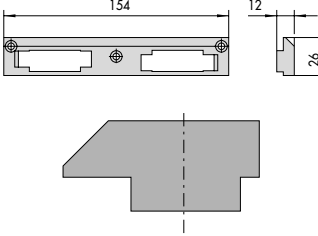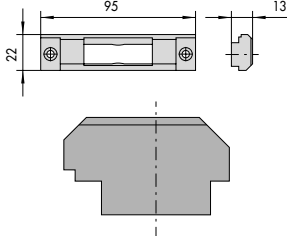
Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		44620, 44621, 44625, 44626, 44640, 44645	0,017 25	1 06287 04 0
		44630, 44635	0,030 25	1 06287 09 0
		44620, 44621, 44625, 44626, 44640, 44645	0,030 25	1 06287 10 0
		14010, 14011, 14012, 14013, 14017, 14018, 14020, 14021, 14350, 14351, 14450, 14451, 14510, 14511, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44155, 44156, 44160, 44161, 44165, 44166, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,030 25	1 06287 11 0
		44630, 44635	0,030 25	1 06287 12 0


Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44165, 44227, 44240, 44245, 44350, 44450	0,016	25	1	06287	14	0
		14011, 14012, 14017, 14020, 14350, 14450, 14510, 44110, 44115, 44140, 44145, 44150, 44155, 44160, 44165, 44227, 44240, 44245, 44350, 44450	0,024	25	1	06287	17	0
		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,017	25	1	06287	21	0
	<p>• For roller locks item 44630 - 44635 use nylon insert item 1.06141.55.0</p>	44620, 44621, 44625, 44626, 44630, 44635, 44640, 44645	0,018	25	1	06287	25	0
		14010, 14011, 14012, 14013, 14017, 14018, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44165, 44166, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,015	25	1	06287	26	0

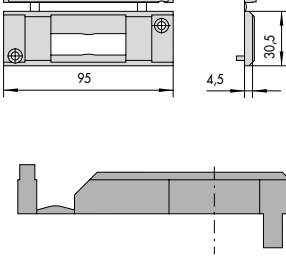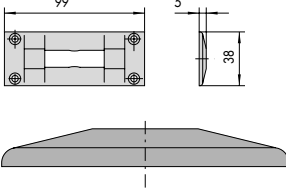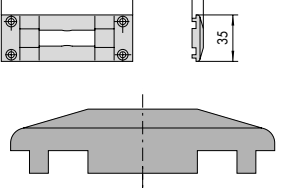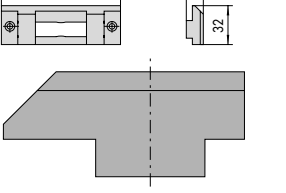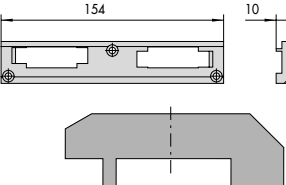
Type	Description	For series/item	 Unit weight  Pieces	ITEM Type Dim. Hand Fin. Pers. Spec.
		14010, 14011, 14012, 14013, 14017, 14018, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44165, 44166, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,014 25 1 06287 27 0	
		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,015 25 1 06287 29 0	
		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,015 25 1 06287 41 0	
		14011, 14013, 14018, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44166, 44228, 44241, 44246, 44351, 44451	0,030 25 1 06287 50 0	
	<ul style="list-style-type: none"> • For roller locks item 44630 - 44635 use nylon insert item 1.06141.55.0 	44620, 44621, 44625, 44626, 44630, 44635, 44640, 44645	0,022 25 1 06287 64 0	


Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Peris. Spec.







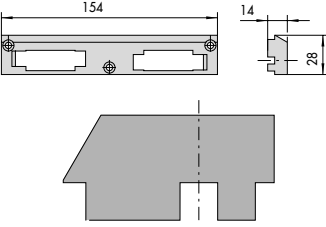
		14011, 14013, 14018, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44166, 44228, 44241, 44246, 44351, 44451	0,016	25	1 06287 65 0				
---	--	--	-------	----	---------------------	--	--	--	--

	• For roller locks item 44630 - 44635 use nylon insert item 1.06141.55.0	44620, 44621, 44625, 44626, 44630, 44635, 44640, 44645	0,030	25	1 06287 70 0				
---	--	--	-------	----	---------------------	--	--	--	--


		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,020	25	1 06287 71 0				
--	--	--	-------	----	---------------------	--	--	--	--

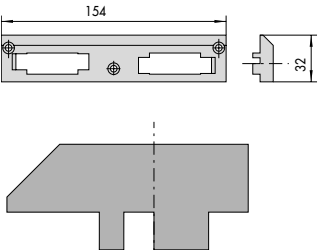		14011, 14013, 14018, 14021, 14351, 14352, 14451, 14452, 14511, 14512, 44111, 44116, 44141, 44146, 44151, 44152, 44156, 44157, 44161, 44162, 44166, 44228, 44241, 44246, 44351, 44451	0,012	25	1 06287 77 0				
---	--	--	-------	----	---------------------	--	--	--	--

	• For roller locks item 44630 - 44635 use nylon insert item 1.06141.55.0	44620, 44621, 44625, 44626, 44630, 44635, 44640, 44645	0,026	25	1 06287 79 0				
---	--	--	-------	----	---------------------	--	--	--	--

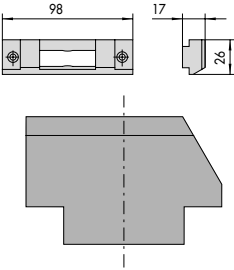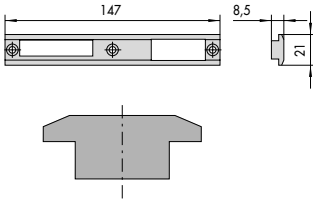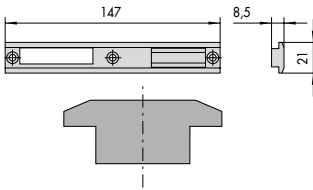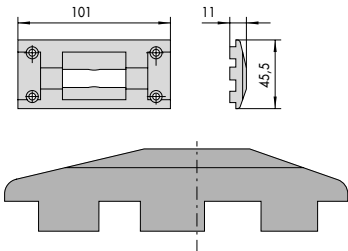
Type	Description	For series/item	 Unit weight  Pieces	ITEM		
				Type	Dim. Hand	Fin. Pers.
		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,023	25	1	06287 80 0
		44620, 44621, 44625, 44626, 44640, 44645	0,012	25	1	06287 88 0
		14010, 14011, 14012, 14013, 14017, 14018, 14020, 14021, 14350, 14351, 14352, 14450, 14451, 14452, 14510, 14511, 14512, 44110, 44111, 44115, 44116, 44140, 44141, 44145, 44146, 44150, 44151, 44152, 44155, 44156, 44157, 44160, 44161, 44162, 44165, 44166, 44227, 44228, 44240, 44241, 44245, 44246, 44350, 44351, 44450, 44451	0,011	25	1	06287 89 0
		44630, 44635	0,030	25	1	06287 90 0
		14011, 14013, 14018, 14021, 14351, 14451, 14511, 44111, 44116, 44141, 44146, 44151, 44156, 44161, 44166, 44228, 44241, 44246, 44351, 44451	0,023	25	1	06287 92 0

Type	Description	For series/item	 Unit weight  Pieces	ITEM				
				Type	Dim.	Hand	Fin.	Pers. Spec.




44620, 44621, 44625,
44626, 44640, 44645

0,022 25 1 06287 94 0




14010, 14011, 14012,
14013, 14017, 14018,
14020, 14021, 14350,
14351, 14352, 14450,
14451, 14452, 14510,
14511, 14512, 44110,
44111, 44115, 44116,
44140, 44141, 44145,
44146, 44150, 44151,
44152, 44155, 44156,
44157, 44160, 44161,
44162, 44165, 44166,
44227, 44228, 44240,
44241, 44245, 44246,
44350, 44351, 44450,
44451

0,020 25 1 06287 95 0




44630, 44635

0,030 25 1 06287 96 0




14011, 14013, 14018,
14021, 14351, 14451,
14511, 44111, 44116,
44141, 44146, 44151,
44156, 44161, 44166,
44228, 44241, 44246,
44351, 44451

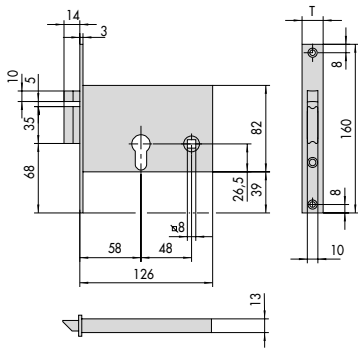
0,017 25 1 06287 97 0



1.14010.60	T	16	1.14013.60	T	20
1.14011.60	T	20	1.14017.60	T	16
1.14012.60	T	16	1.14018.60	T	20



1.14450.70	E	T	B	A
1.14450.80	70	16	10,5	...
1.14450.90	80	16	10,5	...
1.14451.70	70	20	10,5	...
1.14451.80	80	20	10,5	...
1.14451.90	90	20	10,5	...
1.14452.70	70	14,7	15	4,5
1.14452.80	80	14,7	15	4,5
1.14452.90	90	14,7	15	4,5

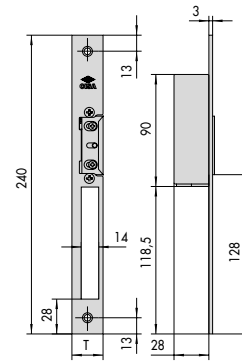


1.15020.00	T	25
1.15021.00	T	34
1.15030.00	T	25

1


4

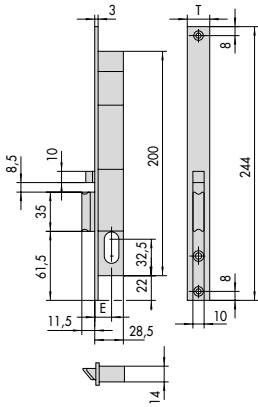7




1.14020.15	T	F	16	15	1.14021.15	T	F	20	15
1.14020.18	T	F	16	18	1.14021.18	T	F	20	18

2



1.14460.70	E	T	B	A
1.14460.80	70	16	10,5	...
1.14460.90	80	16	10,5	...
1.14461.70	70	20	10,5	...
1.14461.80	80	20	10,5	...
1.14461.90	90	20	10,5	...
1.14462.70	70	14,7	15	4,5
1.14462.80	80	14,7	15	4,5
1.14462.90	90	14,7	15	4,5

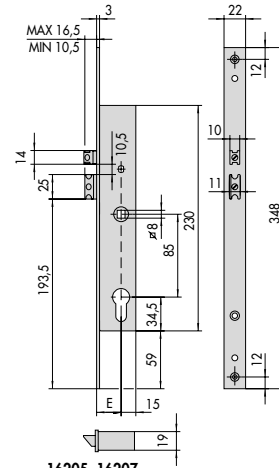


16205, 16207

E = 25 - 30 - 35


5

8




1.14350.70	E	T	B	A
1.14350.80	70	16	10,5	...
1.14350.90	80	16	10,5	...
1.14351.70	70	20	10,5	...
1.14351.80	80	20	10,5	...
1.14351.90	90	20	10,5	...
1.14352.70	70	14,7	15	4,5
1.14352.80	80	14,7	15	4,5

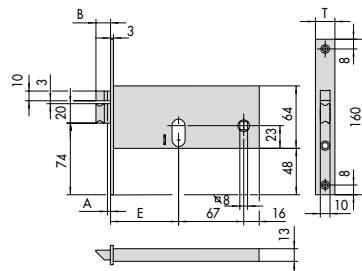3



1.14510.70	E	T	B	A
1.14510.80	70	16	10,5	...
1.14510.90	80	16	10,5	...
1.14511.70	70	20	10,5	...
1.14511.80	80	20	10,5	...
1.14511.90	90	20	10,5	...
1.14512.70	70	14,7	15	4,5
1.14512.80	80	14,7	15	4,5
1.14512.90	90	14,7	15	4,5

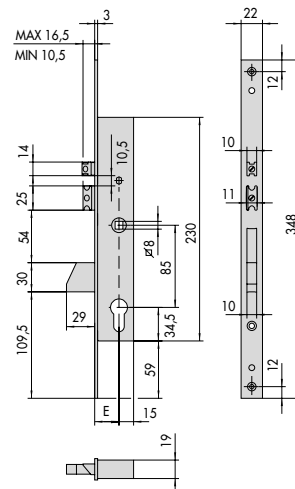


16215, 16216, 16217


E = 25 - 30 - 35

6

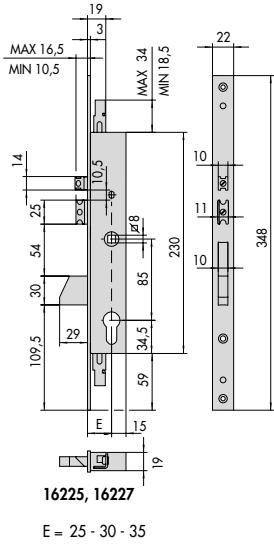
9




10

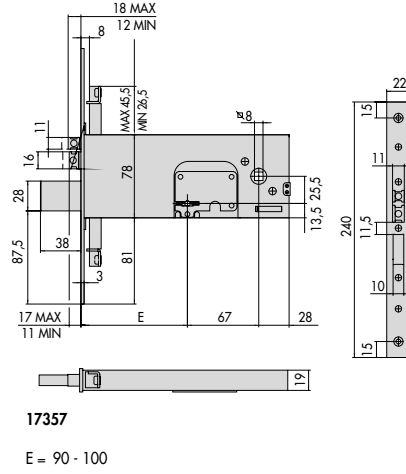


13

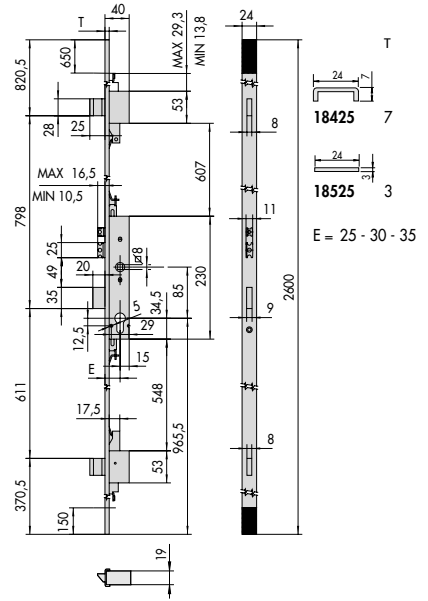


16

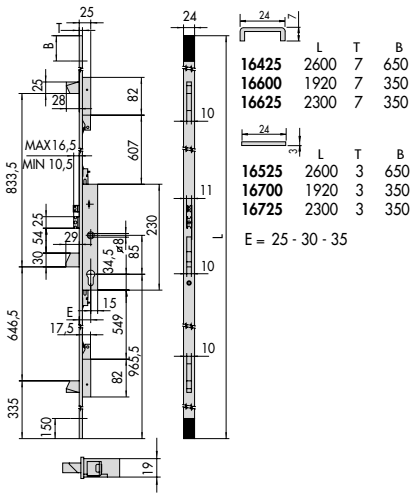


11

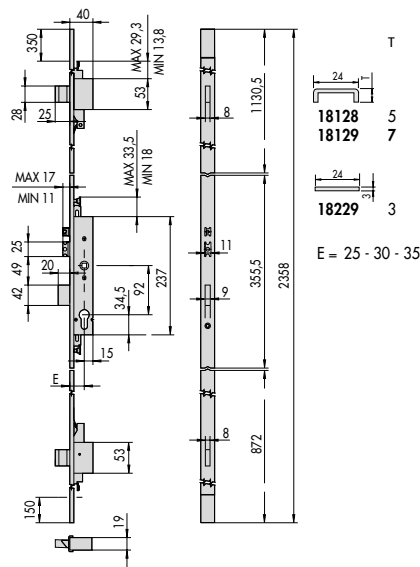


14

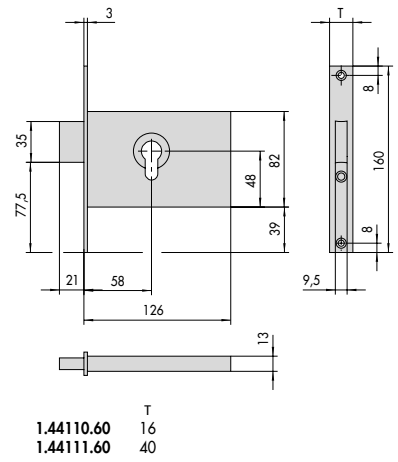


17

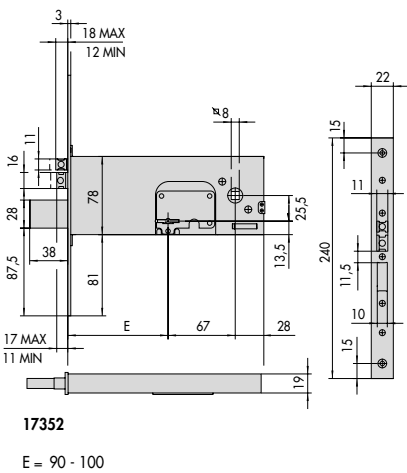




12

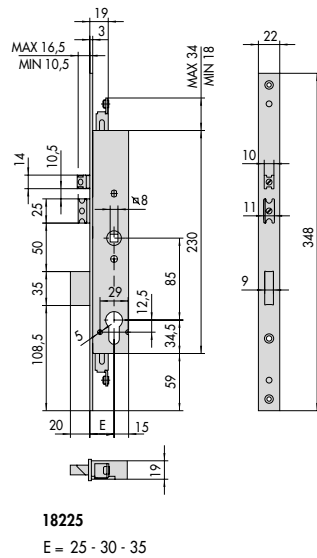

15

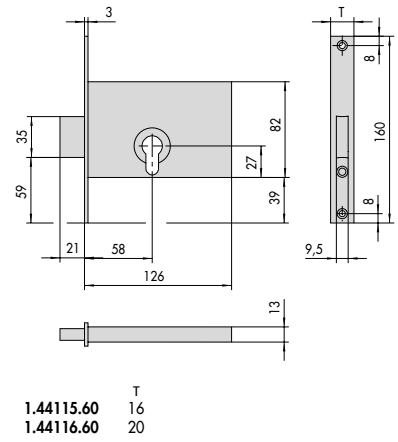




18

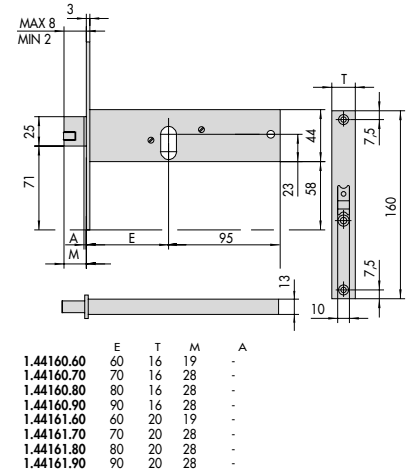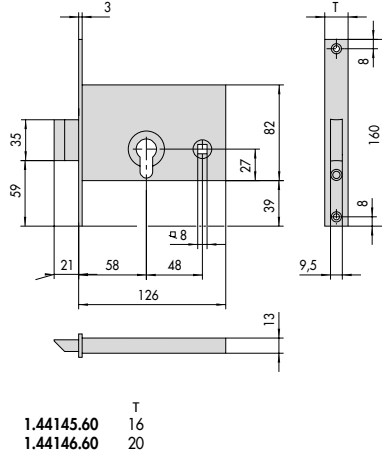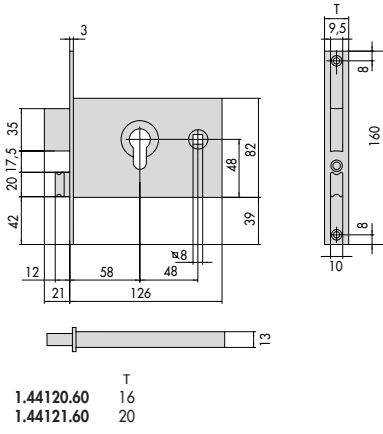

19

22

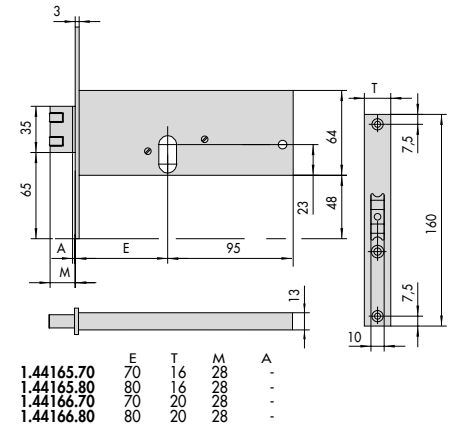
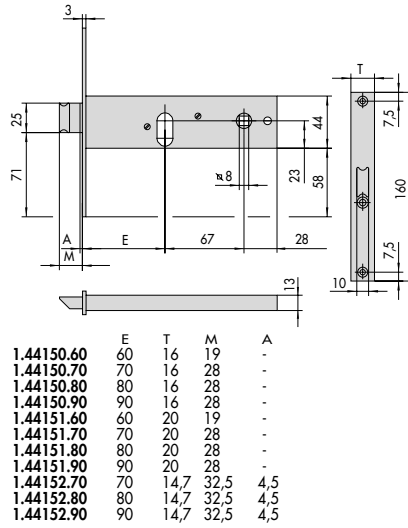
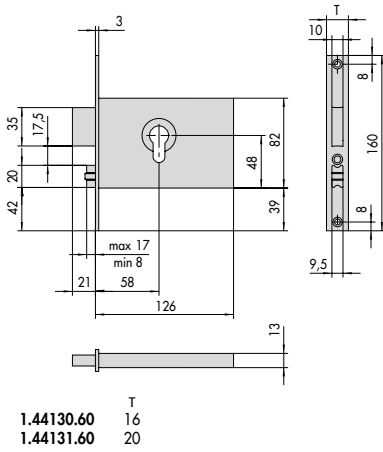
25



20

23

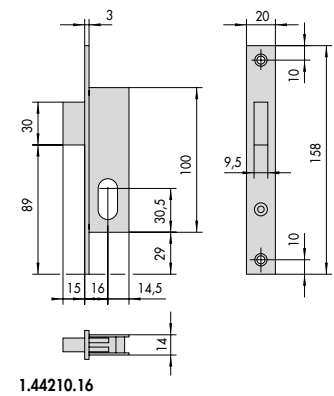
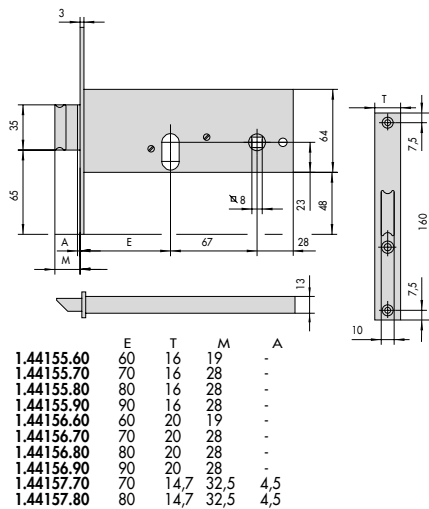
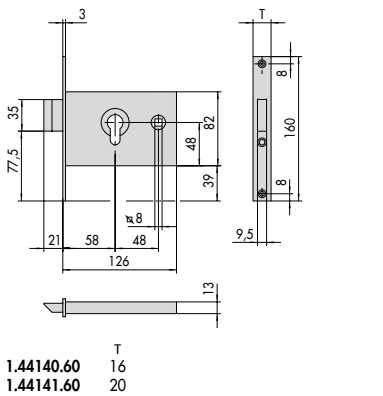
26



21

24

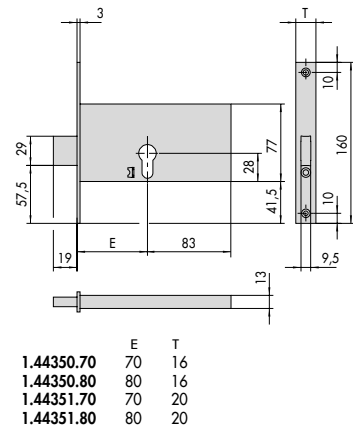
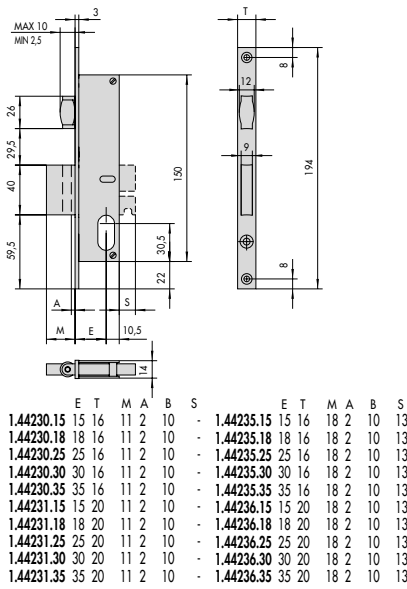
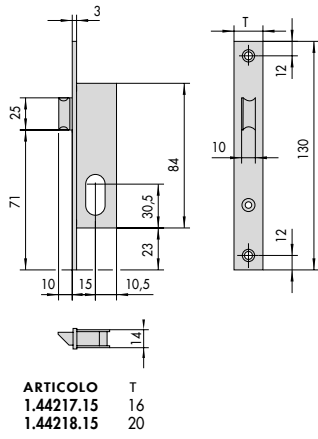
27



28

31

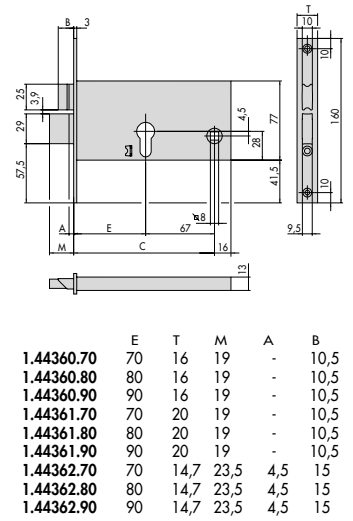
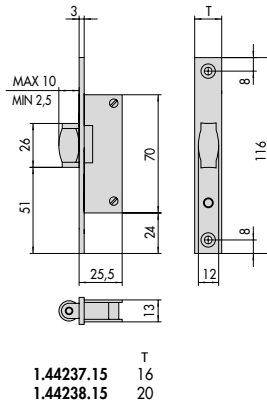
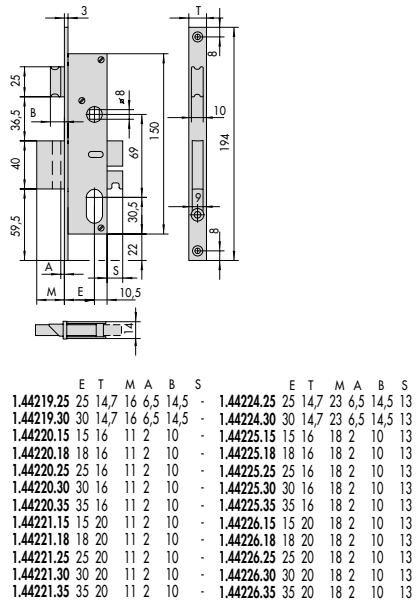
34



29

32

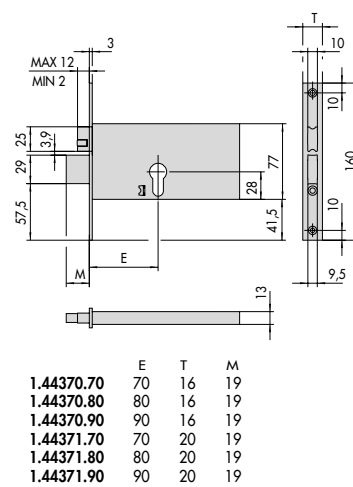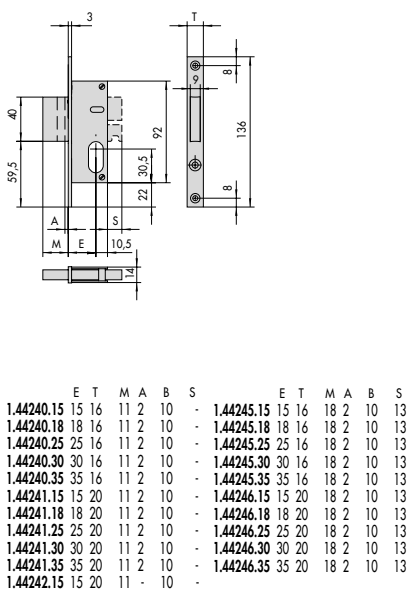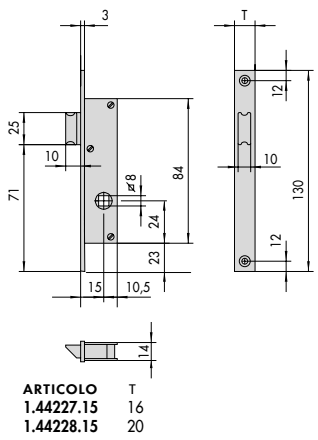
35




30

33

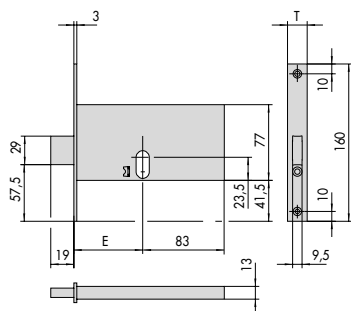
36



	E	T
1.44450.70	70	16
1.44450.80	80	16
1.44451.70	70	20
1.44451.80	80	20

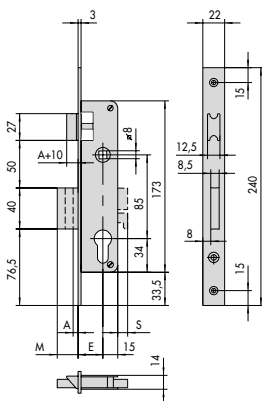

	E	M	A	S		E	M	A	S	
1.44620.20	21	15	-	-		1.44625.20	21	20	-	8,5
1.44620.25	25	15	-	-		1.44625.25	25	20	-	8,5
1.44620.30	30	15	-	-		1.44625.30	30	20	-	8,5
1.44620.35	35	15	-	-		1.44625.35	35	20	-	8,5
1.44621.20	21	20	5	-		1.44626.20	21	25	5	8,5
1.44621.25	25	20	5	-		1.44626.25	25	25	5	8,5
1.44621.30	30	20	5	-		1.44626.30	30	25	5	8,5
1.44621.35	35	20	5	-		1.44626.35	35	25	5	8,5




SERIE
45010, 45012, 45015,
45017, 45025, 45027


37

40


43



	E	T	M	A	B
1.44460.70	70	16	19	-	19
1.44460.80	80	16	19	-	19
1.44460.90	90	16	19	-	19
1.44461.70	70	20	19	-	10,5
1.44461.80	80	20	19	-	10,5
1.44461.90	90	20	19	-	10,5
1.44462.70	70	14,7	23,5	4,5	15
1.44462.80	80	14,7	23,5	4,5	15
1.44462.90	90	14,7	23,5	4,5	15

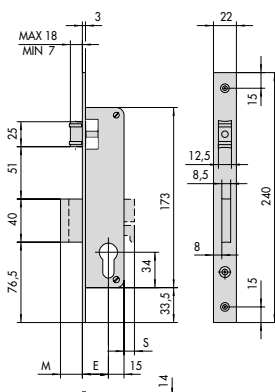

	E	M	A	S
1.44630.20	21	15	-	-
1.44630.25	25	15	-	-
1.44630.30	30	15	-	-
1.44630.35	35	15	-	-
1.44635.20	21	20	-	8,5
1.44635.25	25	20	-	8,5
1.44635.30	30	20	-	8,5
1.44635.35	35	20	-	8,5




45100, 45110
E = 30 - 35 - 40 - 45 - 50 - 60


38

41

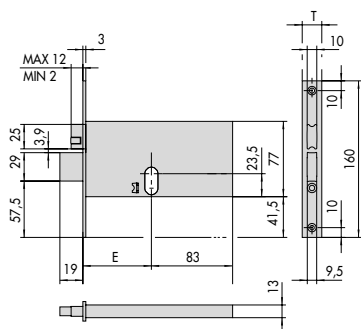
44



	E	T
1.44470.70	70	16
1.44470.80	80	16
1.44470.90	90	16
1.44471.70	70	20
1.44471.80	80	20
1.44471.90	90	20

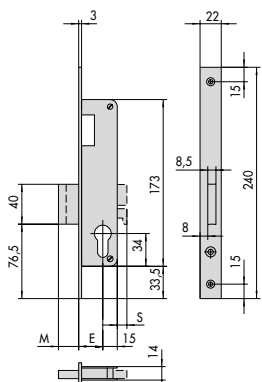

	E	M	S
1.44640.20	21	15	-
1.44640.25	25	15	-
1.44640.30	30	15	-
1.44640.35	35	15	-
1.44645.20	21	20	8,5
1.44645.25	25	20	8,5
1.44645.30	30	20	8,5
1.44645.35	35	20	8,5

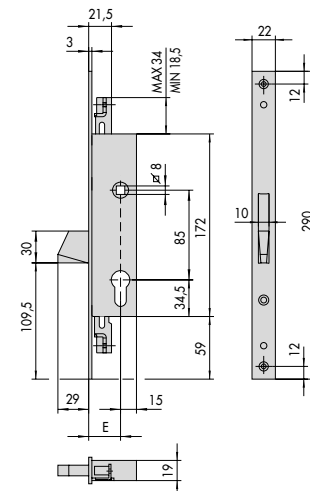


46200
E = 25 - 30 - 35


39

42

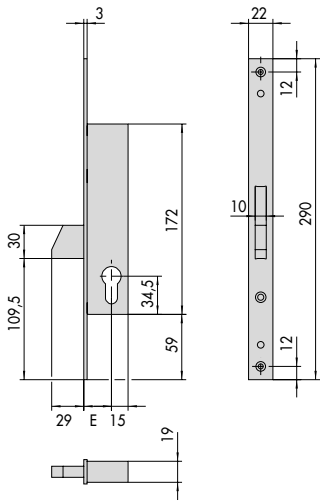
45



46210, 46212
E = 25 - 30 - 35

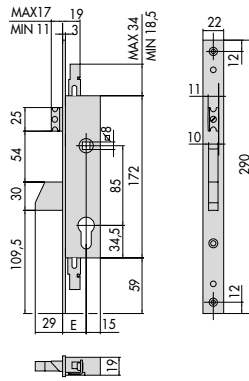


46225, 46227
E = 25 - 30 - 35

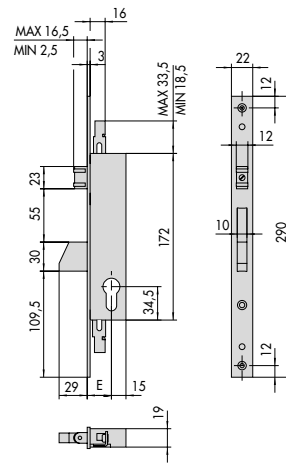


46250, 46252
E = 25 - 30 - 35

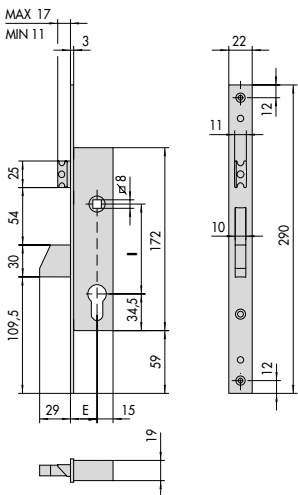46




46215 (l = 85)
46217 (l = 85)
46219 (l = 92)
E = 25 - 30 - 35

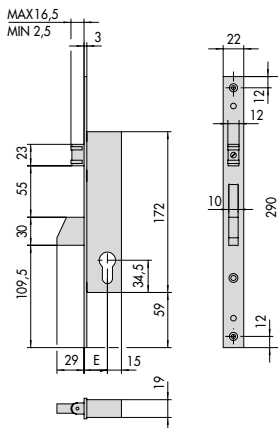49




46230, 46232
E = 25 - 30 - 35

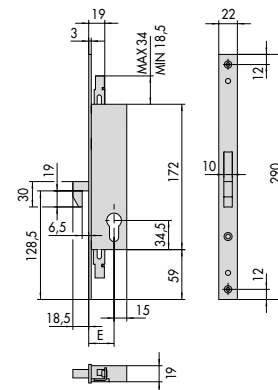52




46260, 46262
E = 25 - 30 - 35

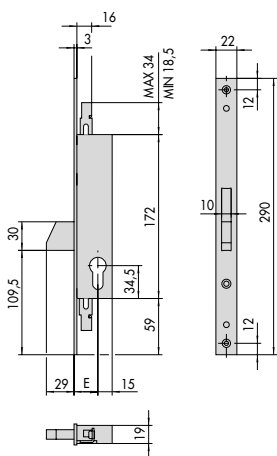47




46220, 46222
E = 25 - 30 - 35

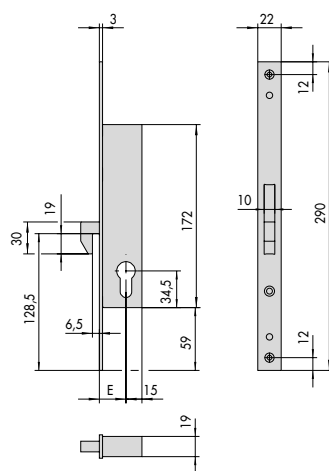50



46240, 46242
E = 25 - 30 - 35

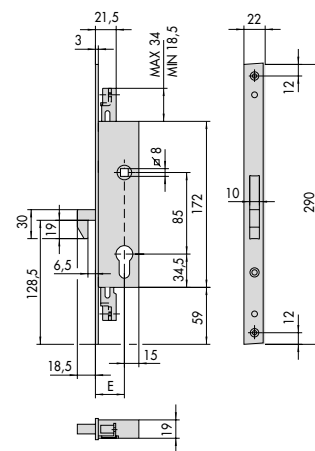53




46265
E = 25 - 30 - 35

48

51

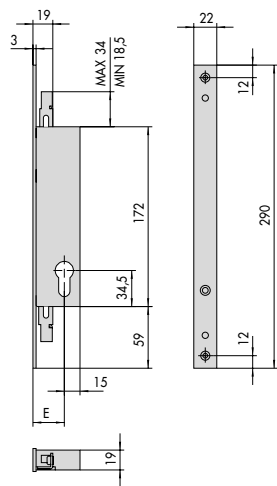
54



46270, 46272

E = 25 - 30 - 35

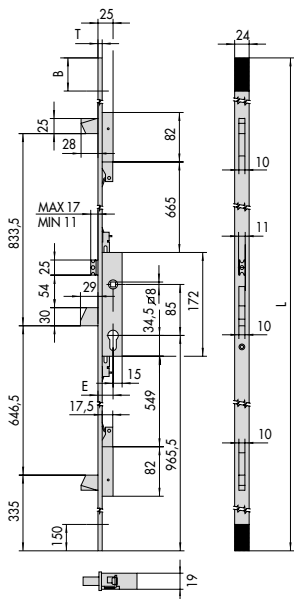55




	L	T	B
46425	2600	7	65
46600	1920	7	35
46625	2300	7	35

	L	T	B
46525	2600	3	65
46700	1920	3	35
46725	2300	3	35

E = 25 - 30 - 35

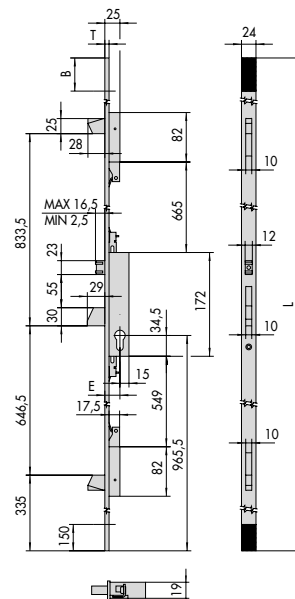58




	L	T	B
46450	2600	7	65
46705	1920	7	35
46650	2300	7	35

	L	T	B
46550	2600	3	65
46750	1920	3	35
46750	2300	3	35

E = 25 - 30 - 35

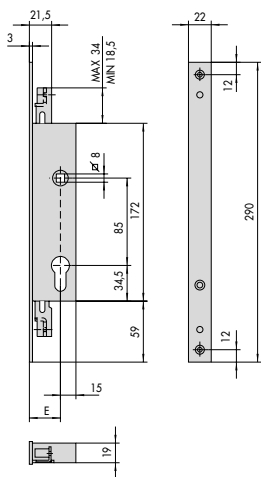
61



46275


E = 25 - 30 - 35

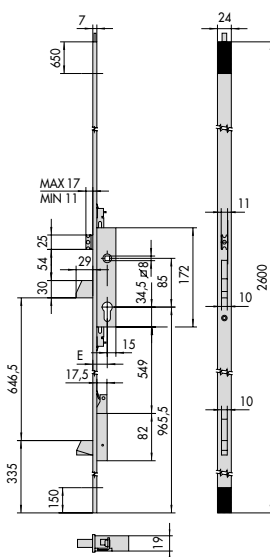56



46435
E = 25 - 30 - 35

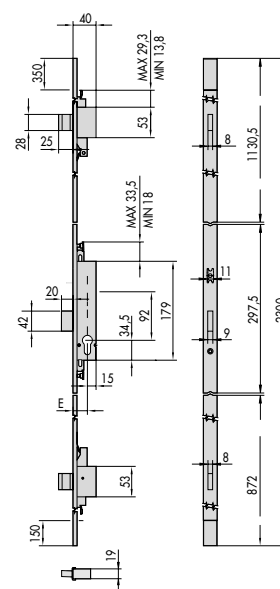
59



	T
48123	5
48124	7
48224	3

E = 25 - 30 - 35

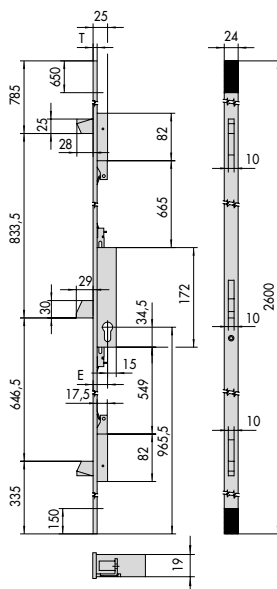
62



	T
46420	7
46520	3


E = 25 - 30 - 35

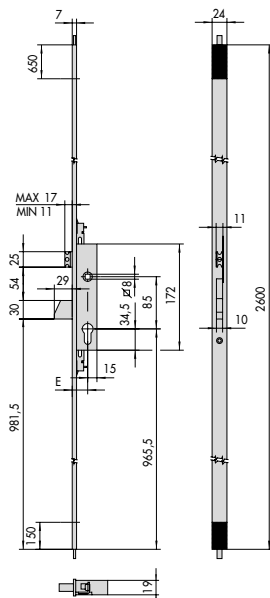57



46445
E = 25 - 30 - 35

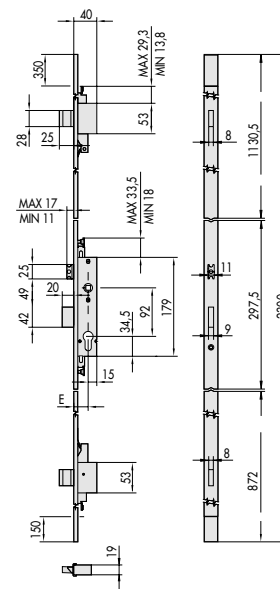
60




	T
48128	5
48129	7
48229	3

E = 25 - 30 - 35

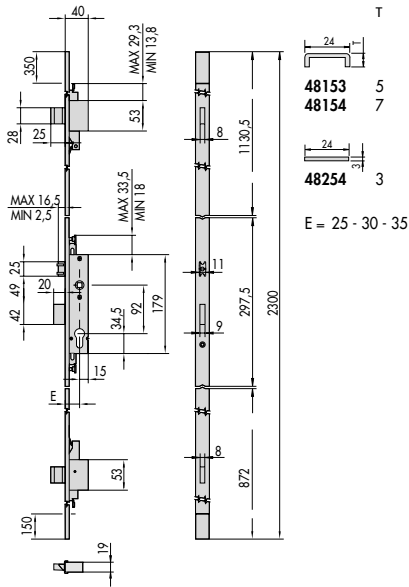63




64

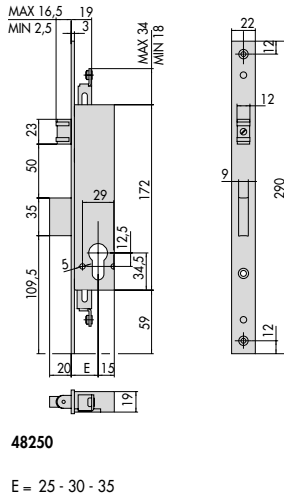


48250

E = 25 - 30 - 35

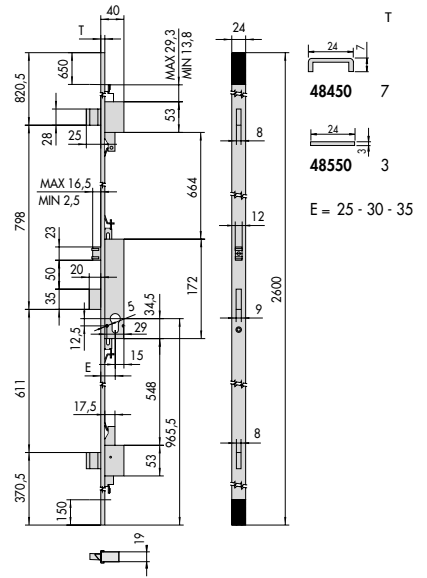67




70

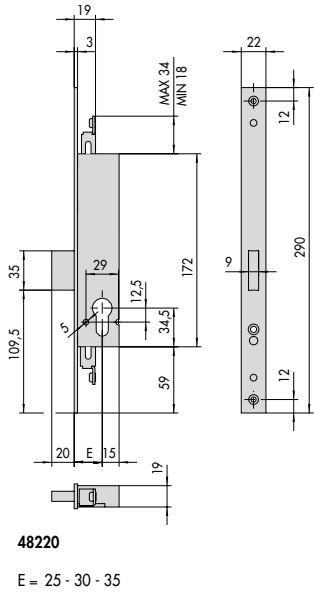

48220


E = 25 - 30 - 35

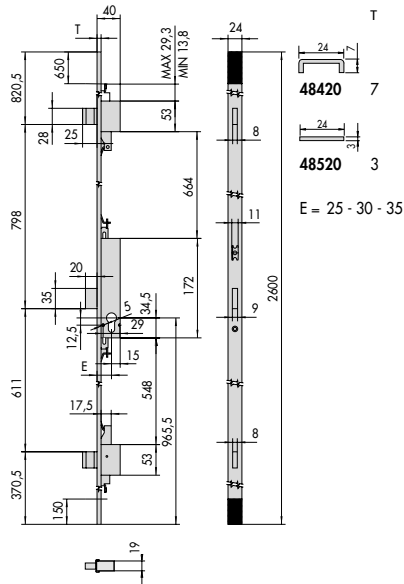65




E = 25 - 30 - 35

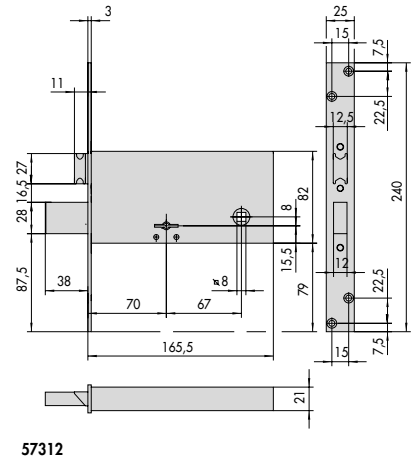68



57312

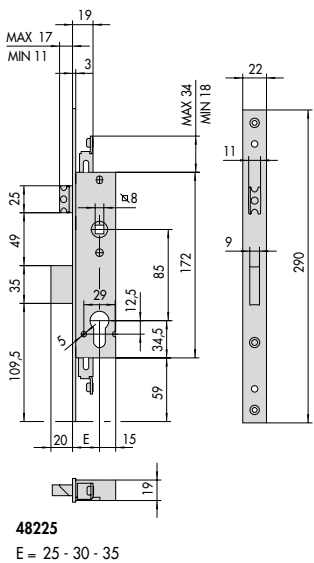
71



48225


E = 25 - 30 - 35

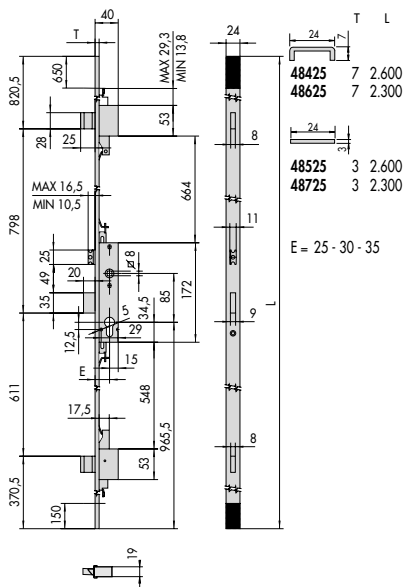66




E = 25 - 30 - 35

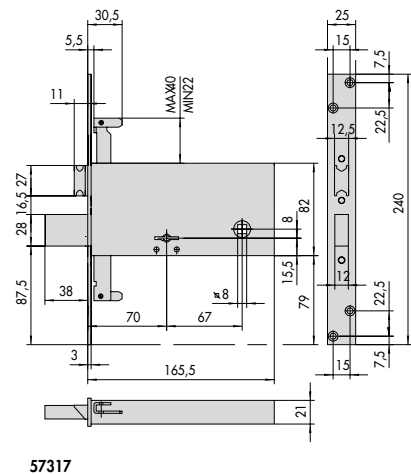69




57317

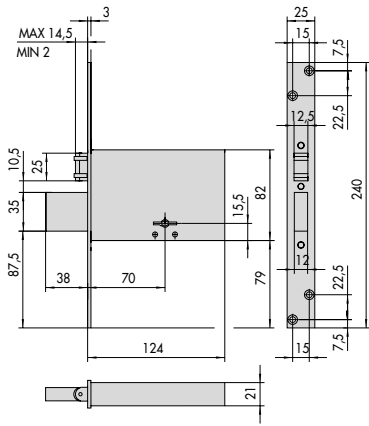
72



57320

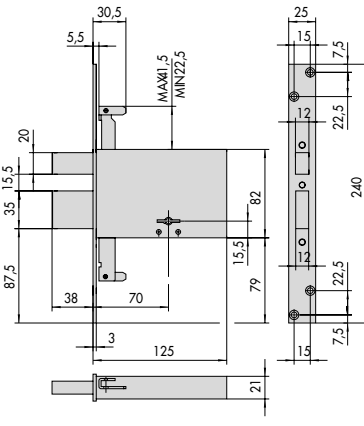

57335

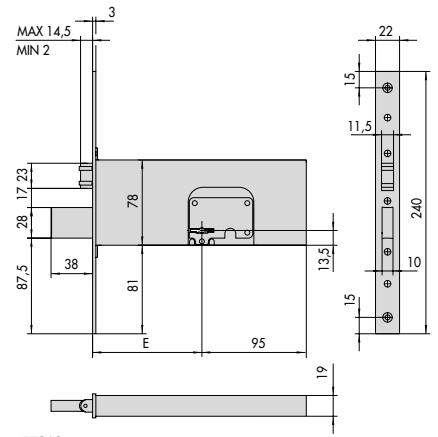


57360
E = 90 - 100


73

76

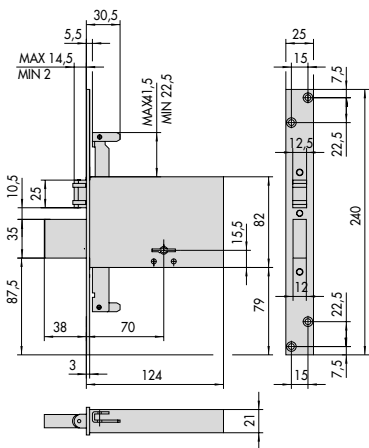
79



57325

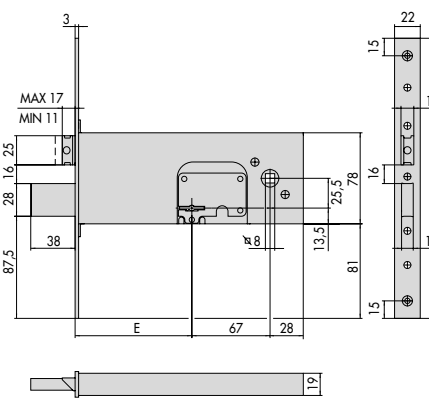

57352
E = 90 - 100

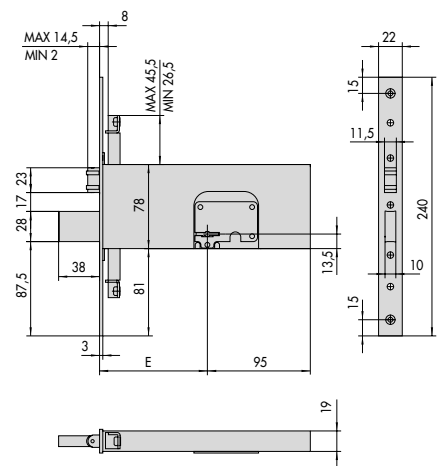


57365
E = 90 - 100


74

77

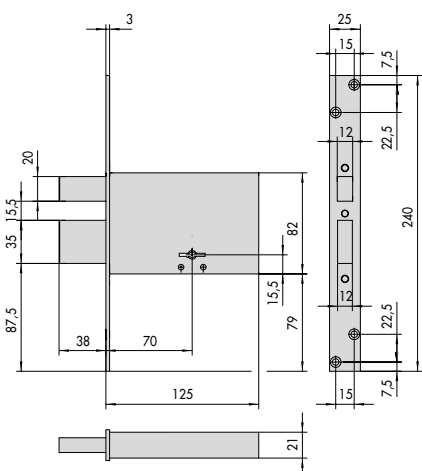
80



57330

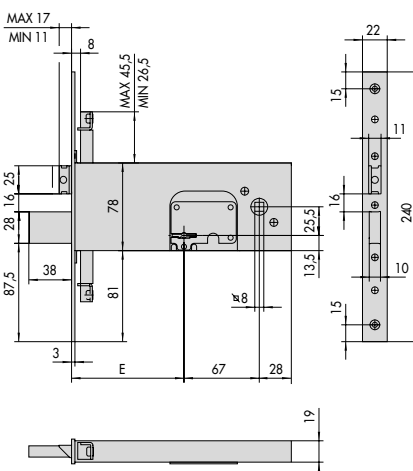

57357
E = 90 - 100

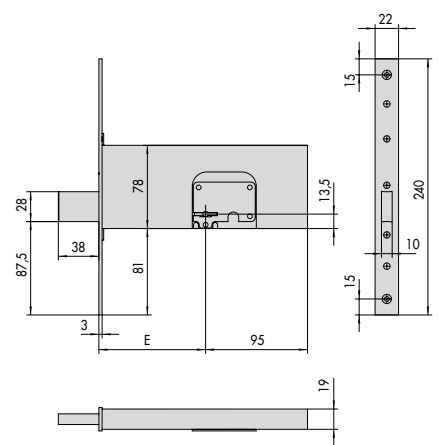


57370
E = 90 - 100

75

78

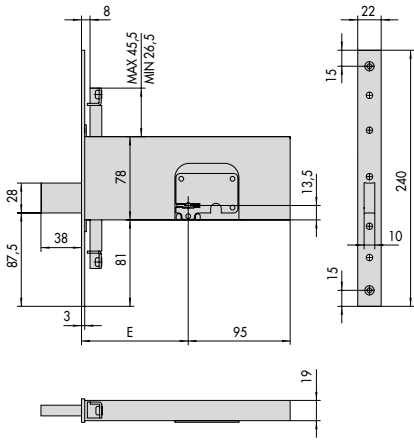81



57375

E = 90 - 100

